

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT			1. Contract Number	Page of Pages 1 1	
2. Amendment/Modification Number DCHA-2011-B-0145-003		3. Effective Date See Section 16C		4. Requisition/Purchase Request No.	
				5. Solicitation Caption Install New Playground and Walking Track at Dakota Park	
6. Issued By: Department of Real Estate Services Contracting and Procurement Division 2000 14th Street N.W., Suite 500 Washington, D.C. 20009			Code 03B	7. Administered By (If other than line 6) Department of Real Estate Services Contracting and Procurement Division 2000 14th Street N.W., Suite 500 Washington, D.C. 20009	
8. Name and Address of Contractor (No. Street, city, country, state and ZIP Code)			(X)	9A. Amendment of Solicitation No. DCHA-2011-B-0145	
				9B. Dated (See Item 11) 6-May-11	
				10A. Modification of Contract/Order No.	
				10B. Dated (See Item 13)	
Code	Facility				
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS					
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers <input type="checkbox"/> is extended. <input type="checkbox"/> is not extended. Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copy of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or fax which includes a reference to the solicitation and amendment number. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or fax, provided each letter or telegram makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.					
12. Accounting and Appropriation Data (If Required)					
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14					
A. This change order is issued pursuant to: (Specify Authority) The changes set forth in Item 14 are made in the contract/order no. in item 10A.					
B. The above numbered contract/order is modified to reflect the administrative changes (such as changes in paying office, appropriation data, etc.) set forth in item 14, pursuant to the authority of 27 DCMR, Chapter 36, Section 3601.2.					
C. This supplemental agreement is entered into pursuant to authority of:					
D. Other (Specify type of modification and authority)					
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input checked="" type="checkbox"/> is required to sign this document and return <u>1</u> copy to the issuing office.					
14. Description of amendment/modification (Organized by UCF Section headings, including solicitation/contract subject matter where feasible.)					
The solicitation is hereby amended as follows:					
Questions received to date regarding this solicitation from prospective bidders and answers from the issuing office are in Attachment 1 to this amendment.					
Except as provided herein, all terms and conditions of the document referenced in Item (9A or 10A) remain unchanged and in full force and effect					
15A. Name and Title of Signer (Type or print)			16A. Name of Contracting Officer Diane Wooden		
15B. Name of Contractor		15C. Date Signed	16B. District of Columbia <i>Diane Wooden</i>		16C. Date Signed 6/11/11
(Signature of person authorized to sign)			(Signature of Contracting Officer)		

**ATTACHMENT 1 TO AMENDMENT #DCHA-2011-B-0145-003
TO SOLICITATION NO. DCHA-2011-B-0145**

QUESTION #1

The shade pavilion to the corner of the park, will it be replaced in kind, and can you give more info on the replacement shed, like how thick the slab would be and other dimensions.

ANSWER #1

Steel framed shade structure, shall be approximately 24' x 50'. Concrete slab shall conform to the attached specification for concrete pad dated 5/26/10.

QUESTION #2

Can more information and/or diagram be provided for C.2.4.6 and C.2.4.7 The steel shade structures, so we can get a better visual idea of what the govt wants.

ANSWER #2

<http://www.rcpshelters.com/as-g.html> Please see this website. The Department of Parks and Recreation (DPR) would like the standard features only. One (1) 24' x 36' & one (1) 24' x 50'. The 24' x 50' is an alternate, per the solicitation.

QUESTION #3

Can more information be provided on C.2.4.8: it was mentioned at the pre-bid meeting that concrete would no longer be used.

ANSWER #3


The Contractor shall use asphalt instead of concrete for the walkway – 2" compacted asphalt on top of 4" compacted stone subgrade.

QUESTION # 4

Per responses to questions in Addendum #2, DRES states that they would like walking trail to be 2" asphalt with compacted subgrade. This contradict section C.2.4.8, in which it states that the Design requirement to be 5' wide concrete walkway with 4" concrete & 4" gravel base. Please confirm whether the walkway should be asphalt or concrete? As well as the correct depth?

ANSWER #4

The correct material for the walkway is asphalt, 2" thick with compacted subgrade (4" aggregate base).

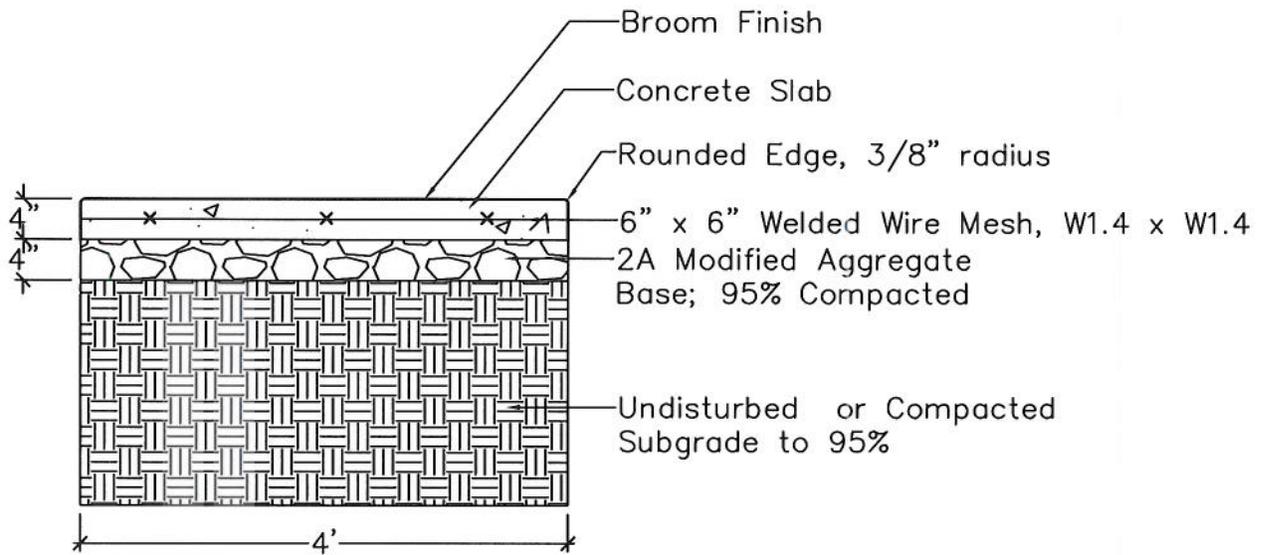

GENERAL INFORMATION

- 1) Verify the exact location and elevation of all underground utilities and other structures before starting work. Call Miss Utility: 1-800-257-7777
- 2) Use extreme care to protect roots of existing trees. Do not stockpile rubble or other debris at the base of trees. Tree protection is to be used to prevent damage during site work.
- 3) Use extreme care to protect all existing elements to remain from damage or displacement. Remove any debris or trash unearthed during excavation and dispose of legally.
- 4) Layout and staking of bench slab is to be done in the field by contractor and approved by the COTR prior to the start of construction.
- 5) Consult drawing for location(s) of bench slab. Bench slab is 4 (four) feet wide X 6 (six) feet long unless specified otherwise on drawing.
- 6) Provide four (4) inches of compacted aggregate base (95% compaction) to reduce the possible heaving (expansion/contraction) from frost.
- 7) Tamp aggregate on two (2) inch lifts to provide a compact, firm surface, allowing for good drainage. Aggregate shall be compacted to 95%.
- 8) Use 6" x 6" welded wire mesh to enhance the strength and bearing potential of the concrete.
- 9) Pour concrete to a depth of four (4) inches. Round all exposed edges to a 3/8" radius edge. Unless otherwise specified, minimum 28 day compressive strength shall be 3500 psi.
- 10) Apply a broom finish surface. Contractor is responsible for concrete until it sets. If graffiti or unwanted marks are visible, contractor must correct.

DATE 05/26/10	NORTH NA	TITLE CONCRETE PAD	DISTRICT OF COLUMBIA DEPARTMENT OF PARKS AND RECREATION Office of Planning & Capital Projects Main Office: 3149 16th Street, N.W. Washington, D.C. 20010 202-673-7647 www.dpr.dc.gov	
SCALE NO SCALE				
TYPE DETAIL				