

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT			1. Contract Number	Page of Pages 1 59	
2. Amendment/Modification Number No. 4	3. Effective Date See Block 16C	4. Requisition/Purchase Request No.	5. Solicitation Caption: Columbia Heights Streetscape		
6. Issued By: Department of Transportation Construction Contract Branch 2000 14th Street, NW, 6th Floor Washington, DC 20009		Code	7. Administered By (If other than line 6) Procurement Support Branch 2000 14th Street, NW, 3rd Floor, Bid Room Washington, DC 20009		
8. Name and Address of Contractor (No. Street, city, country, state and ZIP Code)			(X)	9A. Amendment of Solicitation No. DCKA-2008-B-0103	
				9B. Dated (See Item 11) 6/9/2008	
				10A. Modification of Contract/Order No.	
				10B. Dated (See Item 13)	
Code		Facility			
11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS					
<input checked="" type="checkbox"/>	The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers <input type="checkbox"/> is extended. <input checked="" type="checkbox"/> is not extended. Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or fax which includes a reference to the solicitation and amendment number. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or fax, provided each letter or telegram makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.				
12. Accounting and Appropriation Data (If Required)					
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14					
	A. This change order is issued pursuant to: (Specify Authority) The changes set forth in Item 14 are made in the contract/order no. in item 10A.				
	B. The above numbered contract/order is modified to reflect the administrative changes (such as changes in paying office, appropriation date, etc.) set forth in item 14, pursuant to the authority of 27 DCMR, Chapter 36, Section 3601.2.				
	C. This supplemental agreement is entered into pursuant to authority of:				
	D. Other (Specify type of modification and authority)				
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input checked="" type="checkbox"/> is required to sign this document and return <u>1</u> copies to the issuing office.					
14. Description of amendment/modification (Organized by UCF Section headings, including solicitation/contract subject matter where feasible.) The Current Bid Opening Date of August 6, 2008 is not extended The purpose of this Amendment is to address the following: 1. Respond to questions from prospective bidders (11 pages- this includes 1 page of new Special Provisions SP Nos. 58 and 59 and 2 pages of revised plans). 2. Update the Wage Decision 3. Revise the Pay Item Schedule This amendment No. 4 consists of this page and 58 pages attached hereto NO ADDITIONAL QUESTIONS WILL BE ACCEPTED PER ISSUANCE OF THIS AMENDMENT.					
Except as provided herein, all terms and conditions of the document referenced in Item (9A or 10A) remain unchanged and in full force and effect					
15A. Name and Title of Signer (Type or print)			16A. Name of Contracting Officer Jerry M. Carter		
15B. Name of Contractor	15C. Date Signed	16B. District of Columbia		16C. Date Signed 7/23/2008	
(Signature of person authorized to sign)			(Signature of Contracting Officer)		

ADDITIONAL SPECIAL PROVISIONS

58. As-Built Drawings

Add the following sentence to the end of the third paragraph of subsection 108.12, AS-BUILT DRAWINGS:

All As-Built Drawing electronic files shall be in AutoCAD .dwg format (Version 2006)

59. Portland Cement Concrete Paving

Add the following paragraph to the end of subsection 501.14, JOINTS:

(F) Special Pavement Bands

All special pavement decorative bands shall be considered incidental to the regular PCC slab construction including radial joints, pavement tinting/coloring, special framework, and other incidentals necessary to complete the work.

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
SECTION 0001 COLUMBIA HEGITHS STREETScape - 14 TH STREET NW						
0010	000003 Employee Training	2000.000 HR
0020	000511 Unassigned Special Item -LS - ITEM 618 825 REMOVE TRAFFIC SIGNAL POLE AND TRAFFIC SIGNAL EQUIPMENT	LUMP	LUMP	.	.	.
0030	000514 Unassigned Special Item -SF - ITEM # 611095 METAL STONE VENEER BENCHES AND LAWN SEATING TERRACE.	480.000 SF
0040	108002 Progress Photographs	LUMP	LUMP	.	.	.
0050	108004 As-Built Drawings	LUMP	LUMP	.	.	.
0060	200007 Earthwork and Excavation Special Item - LF - ITEM # 200012 EXISTING STREETCAR TRACK R EMOVAL	1200.000 LF
0070	202002 Common Excavation	5400.000 CY
0080	202004 Hard Surface Pavement Excavation	7400.000 CY

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0090	204002 Embankment Fill	300.000 CY	.		.	
0100	204004 Borrow Embankment Fill	150.000 CY	.		.	
0110	207002 Trench Excavation and Backfill	1225.000 CY	.		.	
0120	207004 Trench Undercut Excavation	120.000 CY	.		.	
0130	207006 Gravel for Trench Undercut	120.000 CY	.		.	
0140	207008 Borrow Trench Backfill	500.000 CY	.		.	
0150	207991 Trench Excavation and Backfill Special Item - CY - SEE SPECS FOR DETAIL	750.000 CY	.		.	
0160	209002 Aggregate Base Course	3600.000 CY	.		.	
0170	212002 Test Pit	80.000 EACH	.		.	
0180	300004 Water and Sewer Service Special Item-EACH- ITEM #300013 CATCH BASIN CLEAN OUT	10.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0190	300005 Water and Sewer Service Special Item-LF - ITEM #300015 CONNECTION PIPE CLEAN OUT	200.000 LF	.		.	
0200	302002 Valve Casing	9.000 EACH	.		.	
0210	303002 Abandon Valve Casing	7.000 EACH	.		.	
0220	303004 Remove Fire Hydrant	1.000 EACH	.		.	
0230	305002 Ductile Iron Pipe, 4 - 8 Inch	150.000 LF	.		.	
0240	305004 Ductile Iron Pipe, 12 Inch	100.000 LF	.		.	
0250	305018 Extra Fittingd - Contractor Furnished	1000.000 LBS	.		.	
0260	305991 Pipe Water Main - Ductile Iron Special Item - LF - ITEM #305005 DUCTILE IRON PIPE, 10 INCH,	1300.000 LF	.		.	
0270	306002 Gate Butterfly Valve, 3 - 12 Inch	9.000 EACH	.		.	
0280	307002 Set Fire Hydrant	1.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0290	308012 Replace Water Service Pipe	530.000 LF	.		.	
0300	308014 Furnish and Install Curb Stop/Curb Stop Box	10.000 EACH	.		.	
0310	308016 Furnish&Install Water Meter Housing, Frame& Cover	10.000 EACH	.		.	
0320	308018 Water Service Test Hole	10.000 EACH	.		.	
0330	309002 Sewer Manhole on Sewer 48 Inch and Less Dia.	100.000 VLF	.		.	
0340	309004 Sewer Manhole on Sewer Greater Than 48 In Dia.	15.000 VLF	.		.	
0350	309006 Reinforced PCC Base on Sewers Greater 48 In Dia.	2.000 EACH	.		.	
0360	310002 Standard Basin	5.000 EACH	.		.	
0370	310004 Standard Double Basin	12.000 EACH	.		.	
0380	310012 Basin Connect PCC Pipe, Class IV, 15 Inch	480.000 LF	.		.	
0390	311004 Reset Sewer-Water-Utility Manhole Frame	65.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0400	311026 Replace Existing Basin with Double Basin	16.000 EACH	.		.	
0410	311028 Replace Existing Basin with Triple Basin	9.000 EACH	.		.	
0420	313002 Abandon Basin Connecting Pipe	24.000 EACH	.		.	
0430	313006 Abandon Basin	6.000 EACH	.		.	
0440	314046 PCC Pipe, Class IV, Gasket, 15 Inch	100.000 LF	.		.	
0450	314048 PCC Pipe, Class IV, Gasket, 18 Inch	500.000 LF	.		.	
0460	322002 PCC Thrust Block	3.000 CY	.		.	
0470	324002 PCC In-Line Thrust Block	2.000 EACH	.		.	
0480	402002 Superpave Base Course, 19 mm	4600.000 TON	.		.	
0490	402012 Sperrpave Surface Course, 12.5 mm	1300.000 TON	.		.	
0500	403002 Tack Coat	8200.000 SY	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)

STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0510	407004 Temporary AC, Superpave Surface Course, 9.5 mm	310.000 TON	.		.	
0520	501008 Reinforced PCC Pavement, 10 Inch	2100.000 SY	.		.	
0530	505006 Replace PCC Pavement, 10 Inch	300.000 SY	.		.	
0540	505024 Replace Driveway-Alley Entrance, 7 Inch	50.000 SY	.		.	
0550	601002 PCC Bus Stop Pad	300.000 CY	.		.	
0560	601004 PCC Median Strip	25.000 CY	.		.	
0570	601006 PCC Directional Island	10.000 CY	.		.	
0580	606002 Pavement Profiling (Milling)	570.000 SY	.		.	
0590	608004 PCC Sidewalk, 4 Inch	2700.000 SY	.		.	
0600	608014 PCC Driveway, 7 Inch	25.000 SY	.		.	
0610	608016 Repair-Replace PCC Sidewalk, 4 Inch	600.000 SY	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0620	608992 Sidwalks & Driveway Special Item - SY - ITEM #608994 PAVERS TYPE 1-8"X8" CLAY U NIT PAVERS	9622.000				
0630	608992 Sidwalks & Driveway Special Item - SY - ITEM #608995 PAVERS TYPE 2-12"X18" PRESS ED CONCRETE UNIT PAVERS	466.000				
0640	608992 Sidwalks & Driveway Special Item - SY - ITEM #608996 PAVERS TYPE 5-4"X4" SQUARE GRANITE PAVERS	591.000				
0650	609038 PCC Gutter, 7 to 10 Inch Depth x 12-24 Inch Width	600.000				
0660	609068 Furnish and Set 8"x12" Granite Straight Curb	4500.000				
0670	609072 Furnish and Set 8"x12" Granite Circular Curb, Radius 10-100 Ft.	1100.000				
0680	609074 Furnish and Set 8"x12" Granite Circular Curb, Radius Over 10 0 Ft.	200.000				
0690	609086 Reset Stone Curb	200.000				

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0700	609200 PCC Wheelchair/Bicycle Ramp - New Construction	EACH 35.000	.		.	
0710	609202 PCC Wheelchair/Bicycle Ramp - Existing Construction	EACH 10.000	.		.	
0720	609500 Brick Gutter	LF 600.000	.		.	
0730	610020 Sod with 4 Inch Topsoil	SY 78.000	.		.	
0740	611002 Remove Tree and Stump up to 6 Inch Dia.	EACH 25.000	.		.	
0750	611004 Remove Tree and Stump 6 to 12 Inch Dia.	EACH 10.000	.		.	
0760	611008 Remove Tree and Stump 18 to 24 Inch Dia.	EACH 5.000	.		.	
0770	611038 Prune Tree 6 Inch Dia. and Under	EACH 5.000	.		.	
0780	611040 Prune Tree 6 Inch to 12 Inch Dia.	EACH 5.000	.		.	
0790	611042 Prune Tree 12 Inch to 18 Inch Dia.	EACH 5.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0800	611044 Prune Tree 18 Inch to 24 Inch Dia.	5.000 EACH	.		.	
0810	611076 Steel Edging	250.000 LF	.		.	
0820	611080 Irrigation System	LUMP	LUMP		.	
0830	611092 Wood Planter	20.000 EACH	.		.	
0840	611094 Park Benches METAL	8.000 EACH	.		.	
0850	611100 Bicycle Lockers	68.000 EACH	.		.	
0860	611104 Litter Baskets SEE SPECS FOR DETAIL	23.000 EACH	.		.	
0870	611429 Euonymus alatus compactus (Dwarf Winged Euonymus) 2 - 2 1/2 Ft. Ht., B&B	30.000 EACH	.		.	
0880	611439 Euonymus fortunei radicans (Common Wintercreeper Euonymus) 1 5 - 18 Inch Spread, 3 Yr., Cont. Growth	3300.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0890	611485 Gleditsia triacanthos inermis 'Shademaster' (Common Shademas ter Thornless Honeylocust) 3 1/2 - 4 Inch Cal., B&B	EACH 10.000	.		.	
0900	611653 Magnolia soulangeana (Saucer Magnolia) 10 - 12 Ft. Ht., B&B	EACH 46.000	.		.	
0910	611722 Parthenocissus quinquefolia (Virginia Creeper) 2 Yr. No. 1, 18 - 24 Inch Long Runners, B.R.	EACH 9.000	.		.	
0920	611833 Quercus coccinea (Scarlet Oak) 3 - 3 1/2 Inch Cal., B&B	EACH 44.000	.		.	
0930	611853 Quercus phellos (Willow Oak) 3 - 3 1/2 Inch Cal., B&B	EACH 17.000	.		.	
0940	611930 Tilia cordata (Littleleaf Linden) 4 - 4 1/2 Inch Cal., B&B	EACH 8.000	.		.	
0950	611997 Zelkova serrata (Japanese Zelkova) 3 - 3 1/2 Inch Cal., B&B	EACH 20.000	.		.	
0960	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611 075 TREE WELL TYPE 1 LANDSCAP ED WITH EDGE GUARD AND RESTRAINT	EACH 75.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0970	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611 077 TREE WELL TYPE 2 WITH EDG E PAVING, GUARD, AND RESTRAINT	EACH 45.000	.		.	
0980	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611 079 TREE WELL TYPE 3 WITH PAV ING, SEE SPECS	EACH 30.000	.		.	
0990	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611189 LIRIOPE SPICATA (LILY TURF)	EACH 2800.000	.		.	
1000	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611190 PENNISETUM ALOPECUROIDES (DWARF FOUNTAIN GRASS)	EACH 710.000	.		.	
1010	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611191 BULBS	EACH 3600.000	.		.	
1020	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611192 LIRIOPE MUSCARI (VARIEGATE D LILY TURF)	EACH 850.000	.		.	
1030	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611194 HYPERICUS CALYCINUM (SAIN T JOHN SWORT)	EACH 200.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1040	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611195 SPIREA SPP (SPIREA)	EACH 10.000	.		.	
1050	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611196 NANDINA DOMESTICA (HEAVENLY BAMBOO)	EACH 10.000	.		.	
1060	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611197 HEMEROCALLIS (DAYLILY)	EACH 30.000	.		.	
1070	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611198 SALVIA SPP (SAGE)	EACH 70.000	.		.	
1080	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611199 SEDIUM SPP (STONECROP)	EACH 70.000	.		.	
1090	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611081 TREEWELL TYPE 4 CIRCULAR WITH GRATE	EACH 42.000	.		.	
1100	611999 Tree, Shrub, Vine, & Ground Cover Special Item - EACH - ITEM # 611193 RUBUS PENTALOBUS (ORNAMENTAL RASPBERRY)	EACH 200.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1110	612002 Mobilization	LUMP	LUMP			.
1120	614012 Portable Precast PCC Barrier	2500.000 LF	.			.
1130	616004 Construction Lane Closing	LUMP	LUMP			.
1140	616006 Remove Lane Markings	2500.000 SF	.			.
1150	616008 Temporary Construction Sign Supports	400.000 EACH	.			.
1160	616010 Portable Traffic Signal Bases	12.000 EACH	.			.
1170	616012 Construction Warning and Detour Signs	6000.000 SF	.			.
1180	616020 Sequential Arrow Boards	2.000 EACH	.			.
1190	616024 Type III PVC Barricade	24.000 EACH	.			.
1200	616026 Type II Barricade	24.000 EACH	.			.
1210	616028 Traffic Drums	200.000 EACH	.			.

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1220	616040 Thermoplastic Pavement Marking, 4 Inch	8800.000 LF	.		.	
1230	616044 Thermoplastic Pavement Marking, 6 Inch	2500.000 LF	.		.	
1240	616050 Thermoplastic Pavement Marking, 12 Inch	2000.000 LF	.		.	
1250	616052 Thermoplastic Pavement Letter	42.000 EACH	.		.	
1260	616054 Thermoplastic Pavement Arrow	23.000 EACH	.		.	
1270	616060 Painted Lane Marking, 4 Inch	6000.000 LF	.		.	
1280	616062 Painted Lane Marking, 6 Inch	2000.000 LF	.		.	
1290	616090 Construction Zone Attenuator	9.000 EACH	.		.	
1300	616100 Sand-Filled Impact Attenuator Module	12.000 EACH	.		.	
1310	616110 PORTABLE CHANGABLE MESSAGE SIGN	2.000 EACH	.		.	
1320	616122 Steel Protection Plate	30.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1330	616992 Traffic Control Special Item - EACH - SEE SPECS FOR DETAIL	EACH 26.000	.		.	
1340	617008 Furnish And Install Pcc Foundation For Traffic Signal Pole Or Pendant Post Street Light Pole	EACH 14.000	.		.	
1350	617014 Furnish And Install One 2 Inch Pvc Encased Electrical Conduit	LF 120.000	.		.	
1360	617016 Furnish And Install One 4 Inch Pvc Encased Electrical Conduit	LF 315.000	.		.	
1370	617024 Furnish And Install Galvanized Steel Transformer Base	EACH 14.000	.		.	
1380	617030 Furnish And Install One 2 Inch And Two 4 Inch Pvc Encased Electrical Conduits	LF 80.000	.		.	
1390	617032 Furnish And Install One 2 Inch And One 4 Inch Pvc Encased Electrical Conduits	LF 740.000	.		.	
1400	617038 Furnish And Install Pcc Foundation For Controller Cabinet	EACH 4.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1410	617040 Furnish Temporary, Portable, Concrete Base For Model 336-S A nd Model 336-Ss Traffic Signal Controller Cabinet	EACH 3.000	.		.	
1420	617042 Furnish Temporary, Portable, Concrete Base For 20 Foot Steel Traffic Signal Pole Mounted On A Transformer Base	EACH 23.000	.		.	
1430	617044 Relocate Any Temporary, Portable, Concrete Base	EACH 23.000	.		.	
1440	617046 Furnish And Install 20 Foot Tall Steel Traffic Signal Pole	EACH 14.000	.		.	
1450	617048 Furnish And Install 8 Foot Long Mast Arm With Clamp And Removable End Cap	EACH 9.000	.		.	
1460	617050 Furnish And Install 7 Conductor 14 Awg Stranded Electrical Traffic Signal Cable	LF 8350.000	.		.	
1470	617054 Furnish And Install 12 Pair 19 Awg Underground Communication s Cable	LF 4200.000	.		.	
1480	617068 Furnish Red Ball Led Module	EACH 43.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1490	617070 Furnish Yellow Ball Led Module	43.000 EACH	.		.	
1500	617072 Furnish Green Ball Led Module	43.000 EACH	.		.	
1510	617078 Furnish Green Arrow Led Module	2.000 EACH	.		.	
1520	617084 Furnish 12 Inch Overlay Lunar White Walking Person And Portl and Orange Raised Hand Led Module	32.000 EACH	.		.	
1530	617086 Furnish 12 Inch Portland Orange Countdown Led Module	32.000 EACH	.		.	
1540	617090 Furnish And Install 3 Section Conventional Traffic Signal He ad On A Pole (All Lenses 12?)	32.000 EACH	.		.	
1550	617092 Furnish And Install 4 Section Conventional Traffic Signal He ad On A Pole (All Lanes 12?)	2.000 EACH	.		.	
1560	617096 Furnish And Install 3 Section Conventional Traffic Signal He ad On A Mast Arm (All Lenses 12?)	9.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1570	617114 Furnish And Install 2 Section Conventional Pedestrian Signal Head On A Pole (12?)	EACH 32.000	.		.	
1580	617124 Furnish And Install Traffic Signal Controller And Cabinet	EACH 4.000	.		.	
1590	617126 Remove Abandoned Traffic Signal Controller Cabinet Foundatio n	EACH 3.000	.		.	
1600	617132 Remove Traffic Signal Controller And Cabinet	EACH 3.000	.		.	
1610	618016 Furnish and Install 36" x 36" x 36" Manhole	EACH 11.000	.		.	
1620	618022 Furnish and Install 48" x 48" x 48" Manhole	EACH 35.000	.		.	
1630	618072 Furnish and Install 1-2" Schedule 40 Rigid PVC Conduit	LF 1400.000	.		.	
1640	618148 Furnish and Install 6-4" Schedule 40 Rigid PVC Conduits (duct bank)	LF 1650.000	.		.	
1650	618150 Furnish and Install 6-4" and 1-2" Schedule 40 Rigid PVC Conduits (duct bank)	LF 800.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1660	618152 Furnish and Install 6-4" and 2-2" Schedule 40 Rigid PVC Cond uits (duct bank)	200.000 LF	.		.	
1670	618154 Furnish and Install 4-4" Schedule 40 Rigid PVC Conduit (duct bank)	1100.000 LF	.		.	
1680	618160 Furnish and Install 2-4" Schedule 40 Rigid PVC Conduit (duct bank)	200.000 LF	.		.	
1690	618164 Furnish and Install 1-2" Schedule 40 Rigid PVC Conduit (Supplemental to already specified duct bank)	50.000 LF	.		.	
1700	618190 Furnish and Install #10 Stranded Wire	14500.000 LF	.		.	
1710	618250 Furnish and Install #0000 Stranded Wire	10000.000 LF	.		.	
1720	618292 Furnish and Install #8 Stranded Ground Wire	7000.000 LF	.		.	
1730	618310 Furnish and Install #2 Stranded Ground Wire	3300.000 LF	.		.	
1740	618394 Furnish and Install 15" B.C. Street Light Foundation	82.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1750	618400 Remove Street Light Pole Foundation	38.000 EACH	.		.	
1760	618436 Furnish and Install 15" B.C Steel Transformer Base	17.000 EACH	.		.	
1770	618486 Furnish and Install #16 Cast Iron Pole	41.000 EACH	.		.	
1780	618526 Furnish and Install Twin 20 Steel/Cast Iron Pole	24.000 EACH	.		.	
1790	618542 Furnish and Install 28'-6" Steel Pendant Pole with up to 8' Arm	17.000 EACH	.		.	
1800	618566 Remove Pendant Pole 30 ft. Height or Less	38.000 EACH	.		.	
1810	618760 Furnish and Install 250 Watt HPS Tear Drop Fixture	17.000 EACH	.		.	
1820	618796 Furnish and Install 150 Watt HPS Conversion Kit	89.000 EACH	.		.	
1830	618860 Furnish and Install 118 Plastic Globe	89.000 EACH	.		.	
1840	618991 ELECTRICAL WORK SPECIAL ITEM -LS- SEE SPECS FOR DETAIL	LUMP	LUMP		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1850	618999 Payment to PEPCO for Connection, Disconnection, Inspection SEE SPECS FOR DETAIL	LUMP	LUMP			20000.00
1860	619991 MECHANICAL WORK SPECIAL ITEM -LS- SEE SPECS FOR DETAIL	LUMP	LUMP			.
1870	620014 Traffic Sign Panels	SF	3600.000	.		.
1880	620032 Remove Existing Ground Mounted Sign	SF	2463.000	.		.
1890	620040 Federal Aid Project Sign	EACH	2.000	.		.
1900	620991 Traffic Signing Special Item - LF - METAL SIGN POST	LF	2500.000	.		.
1910	624002 Engineer's Field Facilities	LUMP	LUMP			.
1920	625002 Field Layout	LUMP	LUMP			.
1930	628002 Erosion and Sediment Control	LUMP	LUMP			.
	SECTION 0001 TOTAL					.

SECTION 0002 COLUMBIA HEIGHTS STREETScape-RECONSTRUCTION OF PARK ROAD NW

District Department of Transportation

PAGE: 22R

DATE:

SCHEDULE OF ITEMS

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1940	000003 Employee Training	600.000 HR	.		.	
1950	000511 Unassigned Special Item -LS - ITEM 618 825 REMOVE TRAFFIC SIGNAL POLE AND TRAFFIC SIGNAL EQUIPMENT	LUMP	LUMP		.	
1960	108002 Progress Photographs	LUMP	LUMP		.	
1970	108004 As-Built Drawings	LUMP	LUMP		.	
1980	202002 Common Excavation	2500.000 CY	.		.	
1990	202004 Hard Surface Pavement Excavation	5000.000 CY	.		.	
2000	207002 Trench Excavation and Backfill	2385.000 CY	.		.	
2010	207004 Trench Undercut Excavation	525.000 CY	.		.	
2020	207006 Gravel for Trench Undercut	525.000 CY	.		.	
2030	207008 Borrow Trench Backfill	945.000 CY	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2040	209002 Aggregate Base Course	1350.000 CY	.		.	
2050	212002 Test Pit	25.000 EACH	.		.	
2060	300004 Water and Sewer Service Special Item-EACH- ITEM #300013 CATCH BASIN CLEAN	10.000 EACH	.		.	
2070	300005 Water and Sewer Service Special Item-LF - ITEM # 300019 REPLACE WATER SERVICE CONNECTIONS IN PUBLIC SPACE	1125.000 LF	.		.	
2080	300005 Water and Sewer Service Special Item-LF - ITEM # 305019 TEMPORARY 6 INCH DIAMETER PVC WATERMAIN	1810.000 LF	.		.	
2090	300005 Water and Sewer Service Special Item-LF - ITEM #300015 CONNECTION PIPE CLEAN	100.000 LF	.		.	
2100	300011 Water and Sewer Service Special Item-VLF - ITEM # 308019 VACUUM TEST HOLE	410.000 VLF	.		.	
2110	302002 Valve Casing	23.000 EACH	.		.	
2120	303002 Abandon Valve Casing	16.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2130	303004 Remove Fire Hydrant	6.000 EACH	.		.	
2140	305002 Ductile Iron Pipe, 4 - 8 Inch	2285.000 LF	.		.	
2150	305006 Ductile Iron Pipe, 16 Inch	15.000 LF	.		.	
2160	305018 Extra Fittingd - Contractor Furnished	1600.000 LBS	.		.	
2170	305991 Pipe Water Main - Ductile Iron Special Item - LF - ITEM # 305007 TEMPORARY 8 INCH DUCTILE I RON WATERMAIN WITH FITTINGS, EXCAVATION,	90.000 LF	.		.	
2180	306002 Gate Butterfly Valve, 3 - 12 Inch	19.000 EACH	.		.	
2190	307008 Furnish Fire Hydrant	6.000 EACH	.		.	
2200	308014 Furnish and Install Curb Stop/Curb Stop Box	66.000 EACH	.		.	
2210	308016 Furnish&Install Water Meter Housing, Frame& Cover	28.000 EACH	.		.	
2220	308018 Water Service Test Hole	65.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2230	309002 Sewer Manhole on Sewer 48 Inch and Less Dia.	25.000 VLF	.		.	
2240	310004 Standard Double Basin	2.000 EACH	.		.	
2250	310012 Basin Connect PCC Pipe, Class IV, 15 Inch	300.000 LF	.		.	
2260	311004 Reset Sewer-Water-Utility Manhole Frame	30.000 EACH	.		.	
2270	311028 Replace Existing Basin with Triple Basin	9.000 EACH	.		.	
2280	313002 Abandon Basin Connecting Pipe	10.000 EACH	.		.	
2290	313006 Abandon Basin	5.000 EACH	.		.	
2300	322002 PCC Thrust Block	3.000 CY	.		.	
2310	324002 PCC In-Line Thrust Block	2.000 EACH	.		.	
2320	402002 Superpave Base Course, 19 mm	4000.000 TON	.		.	
2330	402012 Sperrpave Surface Course, 12.5 mm	1000.000 TON	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2340	403002 Tack Coat	1700.000 SY	.		.	
2350	407004 Temporary AC, Superpave Surface Course, 9.5 mm	150.000 TON	.		.	
2360	505024 Replace Driveway-Alley Entrance, 7 Inch	100.000 SY	.		.	
2370	601002 PCC Bus Stop Pad	100.000 CY	.		.	
2380	602010 Standard PCC Coping	142.000 CY	.		.	
2390	602012 Special PCC Coping ALONG ROW SOME AREAS NEED COPING HIGHER THAN 12", SPECIAL PCC COPINGS REQUIRED	9.000 CY	.		.	
2400	606002 Pavement Profiling (Milling)	2100.000 SY	.		.	
2410	608004 PCC Sidewalk, 4 Inch	2275.000 SY	.		.	
2420	608024 Brick Sidewalk on PCC Base	500.000 SY	.		.	
2430	609038 PCC Gutter, 7 to 10 Inch Depth x 12-24 Inch Width	500.000 SY	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2440	609068 Furnish and Set 8"x12" Granite Straight Curb	3000.000 LF	.		.	
2450	609070 Furnish and Set 8"x12" Granite Circular Curb, Radius Under 10 Ft. RADIUS UNDER 10FT.	300.000 LF	.		.	
2460	609074 Furnish and Set 8"x12" Granite Circular Curb, Radius Over 10 Ft.	110.000 LF	.		.	
2470	609200 PCC Wheelchair/Bicycle Ramp - New Construction	19.000 EACH	.		.	
2480	609202 PCC Wheelchair/Bicycle Ramp - Existing Construction	3.000 EACH	.		.	
2490	611252 Acer rubrum 'October Glory' (October Glory Red Maple) 3 - 3 1/2 Inch Cal., B&B	8.000 EACH	.		.	
2500	612002 Mobilization	LUMP	LUMP		.	
2510	614012 Portable Precast PCC Barrier	2000.000 LF	.		.	
2520	616004 Construction Lane Closing	LUMP	LUMP		.	
2530	616006 Remove Lane Markings	1200.000 SF	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2540	616008 Temporary Construction Sign Supports	150.000 EACH	.		.	
2550	616010 Portable Traffic Signal Bases	4.000 EACH	.		.	
2560	616012 Construction Warning and Detour Signs	2000.000 SF	.		.	
2570	616020 Sequential Arrow Boards	4.000 EACH	.		.	
2580	616024 Type III PVC Barricade	12.000 EACH	.		.	
2590	616026 Type II Barricade	12.000 EACH	.		.	
2600	616028 Traffic Drums	70.000 EACH	.		.	
2610	616040 Thermoplastic Pavement Marking, 4 Inch	5500.000 LF	.		.	
2620	616044 Thermoplastic Pavement Marking, 6 Inch	1400.000 LF	.		.	
2630	616050 Thermoplastic Pavement Marking, 12 Inch	1200.000 LF	.		.	
2640	616052 Thermoplastic Pavement Letter	20.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2650	616054 Thermoplastic Pavement Arrow	15.000 EACH	.		.	
2660	616060 Painted Lane Marking, 4 Inch	2000.000 LF	.		.	
2670	616062 Painted Lane Marking, 6 Inch	1000.000 LF	.		.	
2680	616100 Sand-Filled Impact Attenuator Module	5.000 EACH	.		.	
2690	616110 PORTABLE CHANGABLE MESSAGE SIGN	2.000 EACH	.		.	
2700	616122 Steel Protection Plate	10.000 EACH	.		.	
2710	617008 Furnish And Install Pcc Foundation For Traffic Signal Pole Or Pendant Post Street Light Pole	10.000 EACH	.		.	
2720	617014 Furnish And Install One 2 Inch Pvc Encased Electrical Conduit	5.000 LF	.		.	
2730	617024 Furnish And Install Galvanized Steel Transformer Base	10.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2740	617030 Furnish And Install One 2 Inch And Two 4 Inch Pvc Encased El ectrical Conduits	15.000 LF	.		.	
2750	617032 Furnish And Install One 2 Inch And One 4 Inch Pvc Encased El ectrical Conduits	365.000 LF	.		.	
2760	617038 Furnish And Install Pcc Foundation For Controller Cabinet	2.000 EACH	.		.	
2770	617040 Furnish Temporary, Portable, Concrete Base For Model 336-S A nd Model 336-Ss Traffic Signal Controller Cabinet	2.000 EACH	.		.	
2780	617042 Furnish Temporary, Portable, Concrete Base For 20 Foot Steel Traffic Signal Pole Mounted On A Transformer Base	15.000 EACH	.		.	
2790	617044 Relocate Any Temporary, Portable, Concrete Base	15.000 EACH	.		.	
2800	617046 Furnish And Install 20 Foot Tall Steel Traffic Signal Pole	10.000 EACH	.		.	
2810	617048 Furnish And Install 8 Foot Long Mast Arm With Clamp And Removable End Cap	8.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2820	617050 Furnish And Install 7 Conductor 14 Awg Stranded Electrical T raffic Signal Cable	5450.000 LF	.		.	
2830	617058 Furnish And Install 25 Pair 19 Awg Underground Communication s Cable	1100.000 LF	.		.	
2840	617068 Furnish Red Ball Led Module	25.000 EACH	.		.	
2850	617070 Furnish Yellow Ball Led Module	25.000 EACH	.		.	
2860	617072 Furnish Green Ball Led Module	16.000 EACH	.		.	
2870	617078 Furnish Green Arrow Led Module	9.000 EACH	.		.	
2880	617084 Furnish 12 Inch Overlay Lunar White Walking Person And Portl and Orange Raised Hand Led Module	18.000 EACH	.		.	
2890	617086 Furnish 12 Inch Portland Orange Countdown Led Module	18.000 EACH	.		.	
2900	617090 Furnish And Install 3 Section Conventional Traffic Signal He ad On A Pole (All Lenses 12?)	17.000 EACH	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2910	617096 Furnish And Install 3 Section Conventional Traffic Signal Head On A Mast Arm (All Lenses 12?)	EACH 8.000	.		.	
2920	617114 Furnish And Install 2 Section Conventional Pedestrian Signal Head On A Pole (12?)	EACH 18.000	.		.	
2930	617124 Furnish And Install Traffic Signal Controller And Cabinet	EACH 2.000	.		.	
2940	617126 Remove Abandoned Traffic Signal Controller Cabinet Foundation	EACH 2.000	.		.	
2950	617132 Remove Traffic Signal Controller And Cabinet	EACH 2.000	.		.	
2960	618016 Furnish and Install 36" x 36" x 36" Manhole	EACH 3.000	.		.	
2970	618022 Furnish and Install 48" x 48" x 48" Manhole	EACH 14.000	.		.	
2980	618072 Furnish and Install 1-2" Schedule 40 Rigid PVC Conduit	LF 775.000	.		.	
2990	618148 Furnish and Install 6-4" Schedule 40 Rigid PVC Conduits (duct bank)	LF 455.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
3000	618150 Furnish and Install 6-4" and 1-2" Schedule 40 Rigid PVC Cond uits (duct bank)	LF 680.000	.		.	
3010	618152 Furnish and Install 6-4" and 2-2" Schedule 40 Rigid PVC Cond uits (duct bank)	LF 280.000	.		.	
3020	618154 Furnish and Install 4-4" Schedule 40 Rigid PVC Conduit (duct bank)	LF 235.000	.		.	
3030	618160 Furnish and Install 2-4" Schedule 40 Rigid PVC Conduit (duct bank)	LF 25.000	.		.	
3040	618190 Furnish and Install #10 Stranded Wire	LF 6880.000	.		.	
3050	618250 Furnish and Install #0000 Stranded Wire	LF 4815.000	.		.	
3060	618292 Furnish and Install #8 Stranded Ground Wire	LF 3440.000	.		.	
3070	618310 Furnish and Install #2 Stranded Ground Wire	LF 1605.000	.		.	
3080	618394 Furnish and Install 15" B.C. Street Light Foundation	EACH 52.000	.		.	
3090	618400 Remove Street Light Pole Foundation	EACH 20.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
3100	618436 Furnish and Install 15" B.C Steel Transformer Base	EACH 10.000	.		.	
3110	618486 Furnish and Install #16 Cast Iron Pole	EACH 42.000	.		.	
3120	618542 Furnish and Install 28'-6" Steel Pendant Pole with up to 8' Arm	EACH 10.000	.		.	
3130	618566 Remove Pendant Pole 30 ft. Height or Less	EACH 20.000	.		.	
3140	618760 Furnish and Install 250 Watt HPS Tear Drop Fixture	EACH 10.000	.		.	
3150	618796 Furnish and Install 150 Watt HPS Conversion Kit	EACH 42.000	.		.	
3160	618860 Furnish and Install 118 Plastic Globe	EACH 42.000	.		.	
3170	618999 Payment to PEPCO for Connection, Disconnection, Inspection SEE SPECS FOR DETAIL	LUMP	LUMP		10000.00	
3180	620014 Traffic Sign Panels	SF 400.000	.		.	
3190	620032 Remove Existing Ground Mounted Sign	SF 600.000	.		.	

SCHEDULE OF ITEMS

DATE:

REVISED:

CONTRACT ID: KA2008B0103

PROJECT(S): STP-2401(0002)
STP-2117(007)

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
3200	620040 Federal Aid Project Sign	2.000 EACH	.		.	
3210	620991 Traffic Signing Special Item - LF - METAL SIGN POST	300.000 LF	.		.	
3220	624002 Engineer's Field Facilities	LUMP		LUMP		.
3230	625002 Field Layout	LUMP		LUMP		.
3240	628002 Erosion and Sediment Control	LUMP		LUMP		.
	SECTION 0002 TOTAL					.
	TOTAL BID					.

**DCKA-2008-B-0103
Columbia Heights Streetscape Contract
(14th Street Core Area and Reconstruction of Park Road)
AMENDMENT NO. 4**

RESPONSE TO QUESTIONS/COMMENTS FROM PROSPECTIVE BIDDERS

SPECIAL PROVISIONS

COMMENT: **Installation of Frames for Public Art Inlays, Item 611 092
(SP-38 – Page 31)**

Where is the Pay Item in the Schedule of Prices for this work?

RESPONSE: **The pay item for this item is on line 0820, page 9 of the bid form.
The specifications for this particular item can be found under SP
#38, Page 31 of the Special Provisions and Details 1 and 2 on
Sheet A5.2**

COMMENT: **Structural Soil Backfill, Item 207 991
(SP-30 – Page 19)**

Is this the same material that was used around the Stadium and on South Capitol Street?

RESPONSE: **While we don't have a copy of the exact specification of the
structural soil material that was used in and around Nationals
Stadium along South capitol Street, the intent is to use a soil
backfill material that promotes vigorous tree and root growth.
So, yes this material would appear to be an "equal" material
pending formal review and approval of the submittal for this
item.**

COMMENT: **Sidewalk and Plaza Special Pavers, Item 608 992
D. Measurement and Pavement
(SP-34 – Page 24)**

SP says payment is by the Square Foot, but Schedule of Prices lists each item as Square Yard. Which measurement is correct and which measurement was used to determine the estimated quantity?

RESPONSE: **Square Yards (SY) is the correct unit of measurement. The
Special Provision should be revised to say Square Yards (SY).**

COMMENT: Streetscape Furnishings – Metal Park Benches, Item 611 094
(SP-39 – Page 32)

SP states that the benches will be in accordance with the drawings.
Where are the drawings of the benches?

RESPONSE: The drawings show where the benches are to be located. SP 39 clearly notes the type of bench, Landscape Forms Plainwell Metal Horizontal Strap, or approved equal that is required for use on the project.

- **SCHEDULE OF PRICES**

COMMENT: Bicycle Lockers, Item 611 100
(CLIN 840)

Where are the specifications for this Pay Item?

RESPONSE: This item was established for inverted U bicycle racks. It is described under SP #42, Page 33.

COMMENT: Progress Photographs, Item 108 002 (CLIN 30)
Progress Photographs, Item 108 002 (CLIN 1950)
As-Built Drawings, Item 108 004 (CLIN 40)
As-Built Drawings, Item 108 004 (CLIN 1960)
Engineer’s Field Facilities, Item 624 002 (CLIN 1910)
Engineer’s Field Facilities, Item 624 002 (CLIN 3220)
Field Layout, Item 625 002 (CLIN 1920)
Field Layout, Item 625 002 (CLIN 3230)
Erosion and Sediment Control, Item 624 002 (CLIN 1930)
Erosion and Sediment Control, Item 624 002 (CLIN 3240)

Will DDOT pay for each Pay Item or should only one be used?

RESPONSE: Because of funding sources, there is a need to have two separate Pay Items for this item. Therefore, DDOT will pay for each Pay Item which should be pro-rated the respective cost of each component project.

COMMENT: **Mobilization, Item 612 002 (CLIN 1100)**
Mobilization, Item 612 002 (CLIN 2490)

Will DDOT pay for each Pay Item or should only one be used?

RESPONSE: **Because of funding sources, there is a need to have two separate Pay Items for this item. Therefore, DDOT will pay for each Pay Item which should be pro-rated the respective cost of each component project.**

COMMENT: **Mobilization, Item 612 002 (CLIN 1100)**
Mobilization, Item 612 002 (CLIN 2490)

Specifications state that mobilization will be evenly divided evenly between the two projects. Isn't this contrary to the specification regarding the formula for computation of mobilization?

RESPONSE: **Because of funding sources, there is a need to have two separate Pay Items for this item.**

DELETE SP #1, line 14, last sentence of second paragraph which reads "The cost of mobilization for the project shall be equally divided between the two portions."

ADD SP #1, line 14, as the last sentence of the second paragraph the following "The cost for mobilization for each portion of the project shall be calculated according the standard Blue Book formula."

COMMENT: **Progress Photographs, Item 108 002 (CLIN 30)**
Progress Photographs, Item 108 002 (CLIN 1950)

How many photographs are required? Using two items 500 would be required. According to the specifications doesn't that sound like too many?

RESPONSE: **A total of 250 photographs will be required for each item.**

COMMENT: **As-Built Drawings, Item 108 004 (CLIN 40)**
As-Built Drawings, Item 108 004 (CLIN 1960)

There are several SP specifications currently being used for As-Built drawings because, while the new specifications (Revised 2007) are clear about the number of required copies, the type of electronic file is not explained. Are we to modify electronic .pdf files or Microstation.dgn files?

RESPONSE: **Because of coordination with all the ongoing development projects that took place in Columbia Heights over the years which were primarily done in AutoCAD, the base files for this project are done in .dwg format. SP #58 has been added to the addendum to clarify what is required. (see attached)**

COMMENT: **Reinforced PCC Pavement, 10" Depth, Item 501 008 (CLIN 510)**

There are several references to 2' colored concrete strips in proposed intersections. Where are the specifications for this concrete and what color do you desire?

RESPONSE: **The 2' colored concrete strips are to be paid as part of the regular 10" PCC Pavement Pay Item (Item 501 008). The color admixture shall be dark grey/black to match with the corresponding portion of the black granite band in the sidewalk areas as well as the granite used for the stone veneer seating.**

COMMENT: **Reinforced PCC Pavement, 10" Depth, Item 501 008 (CLIN 510)**

Where is the Pay Item for this work?

RESPONSE: **A special provision for this item is included in the Addendum instructing the contractor on what items of work (radial pavement, decorative 2' strip, colored concrete, etc) have been made incidental to this particular bid item. SP 59 has been added to the Addendum to clarify what is required. (see attached)**

COMMENT: **Reinforced PCC Pavement, 10" Depth, Item 501 008 (CLIN 510)**

What will prevent these 2' strips from breaking under normal vehicular traffic?

RESPONSE: **The strips are reinforced just the same as normal 10" PCC pavement with the reinforcing extending continuously through the accent paving band.**

- **PLANS**

COMMENT: **Concrete Pavement Joint Plan – Intersection Irving St & Park Road
(Sheets 27-B & 27-C)**

What do the large bold numbers represent?

RESPONSE: **The bold numbers represent a suggested and generalized sequence of construction that attempts to minimize traffic disruptions for the maximum amount of time.**

COMMENT: **Concrete Pavement Joint Plan – Intersection Irving St & Park Road
(Sheets 27-B & 27-C)**

Are we to construct circular roadway joints?

RESPONSE: **Yes, circular joints are required.**

COMMENT: **Concrete Pavement Joint Plan – Intersection Irving St & Park Road
(Sheets 27-B & 27-C)**

Where is the horizontal engineering design for these intersections?

RESPONSE: **Layout information is shown on the roadway plans. Radii for the various bands are shown on the architectural plans (Sheets A1.3, A1.6 & A1.7)**

COMMENT: **Concrete Pavement Joint Plan – Intersection Irving St & Park Road
(Sheets 27-B & 27-C)**

Where are the proposed elevations for these intersections?

RESPONSE: **Base elevation information is shown on both the Existing Condition Plans and Roadway Plans. Because of all the construction that has taken place since the base survey for the project was completed, Special Provision 54, Page 52 requires the contractor to conduct new surveys and submit in a shop drawing/submittal type format showing all existing and new proposed elevations.**

COMMENT: **Concrete Pavement Joint Plan – Intersection Irving St & Park Road**
(Sheets 27-B & 27-C)

The transverse joints do not line up, who will be responsible when the pavement fails?

RESPONSE: **Revised plan sheets showing the revised transverse joints which minimize the number of non-aligned joints are being issued in this addendum.**

DELETE Plan Sheet C-25B “Concrete Pavement Joint Plan Intersection Irving Street &14th Street”.

ADD Plan Sheet C-25BR “Concrete Pavement Joint Plan Intersection Irving Street &14th Street”. (1 page attached)

DELETE Plan Sheet C-25C “Concrete Pavement Joint Plan Intersection Park Road &14th Street”.

ADD Plan Sheet C-25CR “Concrete Pavement Joint Plan Intersection Park Road &14th Street”. (1 page attached)

COMMENT: **Architectural Drawings & Details**
(Sheets 95 thru 125)

There are several references to circular tree grates, but where are the specifications and the Pay Item in the Schedule of Prices?

RESPONSE: **SP 40 for Planter Type 4 included circular tree grates which calls for Neenah Foundry Majestic Collection R-8871-1 or approved equal**

COMMENT: **#16 Cast Iron Pole**
Bid Item #618486

This product construction and use is similar to the Twin 20 Cast Iron Pole (Bid Item 618526) which uses cast aluminum as part of its construction. The escalating cost of the steel materials market along with the subsequent scarcity of American foundries to produce this product is limiting the availability of suppliers. Can this item be provided in Cast Aluminum?

RESPONSE: **No, cast aluminum poles are not acceptable to DDOT.**

- **RECONSTRUCTION OF PARK ROAD, N.W.**

COMMENT: **Remove Street Light Pole and Street Light Equipment – Qty. 8ea
Line 2940 – 617-128**

Plans and tables indicate a quantity of twenty (20) removals.

RESPONSE: **The original estimate by our lighting designer (Volkert) did not
include this pay item (617 128). The correct pay item should be
No 000 511 unassigned special item, LS – 618 825 Remove Traffic
Signal Pole and Traffic Signal Equipment, which is a lump sum
item for each intersection. (See revised pay item schedule)**

COMMENT: **Furnish and Install 250 Watt HPS Cutoff Luminaries
Line 3140 – 618-754**

Detail on Drawing #43 of 62 shows Teardrop style. Which is correct?

RESPONSE: **Line item 3140 – 618 754 is incorrect. The Pay Item No. should
be 618 760 for Furnish and install 250 Watt HPS Tear Drop
Fixture. (see revised pay item schedule)**

COMMENT: There is no bid item for removal of luminaries on pendant poles.
Should this be included in item line 2940 – 617-128? Are luminaries
to be returned to DDOT?

RESPONSE: **The bidders attention is directed to Pay Item 618 566 – “Remove
Pendant Pole 30 Ft Height or Less”. The poles and luminaries
are to be returned to DDOT as directed in the plans.**

COMMENT: **Furnish and Install 15” B.C. Street Light Foundation – 10 each
Line 3080 – 618-394**

There are 52 poles indicated for installation. Each needs a
foundation. Please correct quantity.

RESPONSE: **Line 3080 – 618 394 quantity should be fifty-two (52) and not ten
(10). (see revised pay item schedule)**

COMMENT: **Furnish Temporary, Portable, Concrete Base for 20 Foot Steel Traffic Signal Pole Mounted on a Transformer Base – 15 each
Line 2770 – 617-042**

Does this item include the pole, transformer base, signals and wiring?

RESPONSE: **Line 2770 – 617 042 “Furnish Temporary, Portable, Concrete Base for 20 Foot Steel Signal Pole Mounted on a Transformer Base” (total quantity of 15 Each) does include all labor and materials (pole, signal heads, transformer base and wiring (7C #14 AWG) as noted in Section 617.21 of the Blue Book.**


• **ELECTRICAL WORK SPECIAL ITEM**

COMMENT: **Bid Item 1840/ 618-991
Drawing Sheets 86, 87, and 117 thru 124
Specification (Page 37, Sect 50)**

“Electrical And Specialty Lighting System Design” requires the contractor to provide a design-build electrical and specialty lighting system needed for the Triangle Plaza Area Lighting, Metro Plaza Area Lighting, fountain lights and Equipment, and other related items – preparing the design plans in three approval-completion steps. It also calls for the bid item price to include providing the electrical installations called for in that three step design not yet provided. It will be impossible for the electrical sub-contractor to estimate a fair price for this work prior to completion of the design. Can this specific bid item be properly designed prior to this bid, or separated from the contract bid package to avoid forcing the contractor to make a blind guess about the cost of the work involved?

RESPONSE: **No, this item cannot be separated from this contract. Requirement drawings showing the design intent of the proposed fountain design-build item as well as the general layout and location of mechanical and electrical vaults and equipment were provided in the contract documents to help clarify what would be required of prospective bidders.**

REQ	STATE	PROJECT	SHEET NO.	TOTAL SHEETS
3	D.C.	STP - 2401 (002)	C25CR1	176

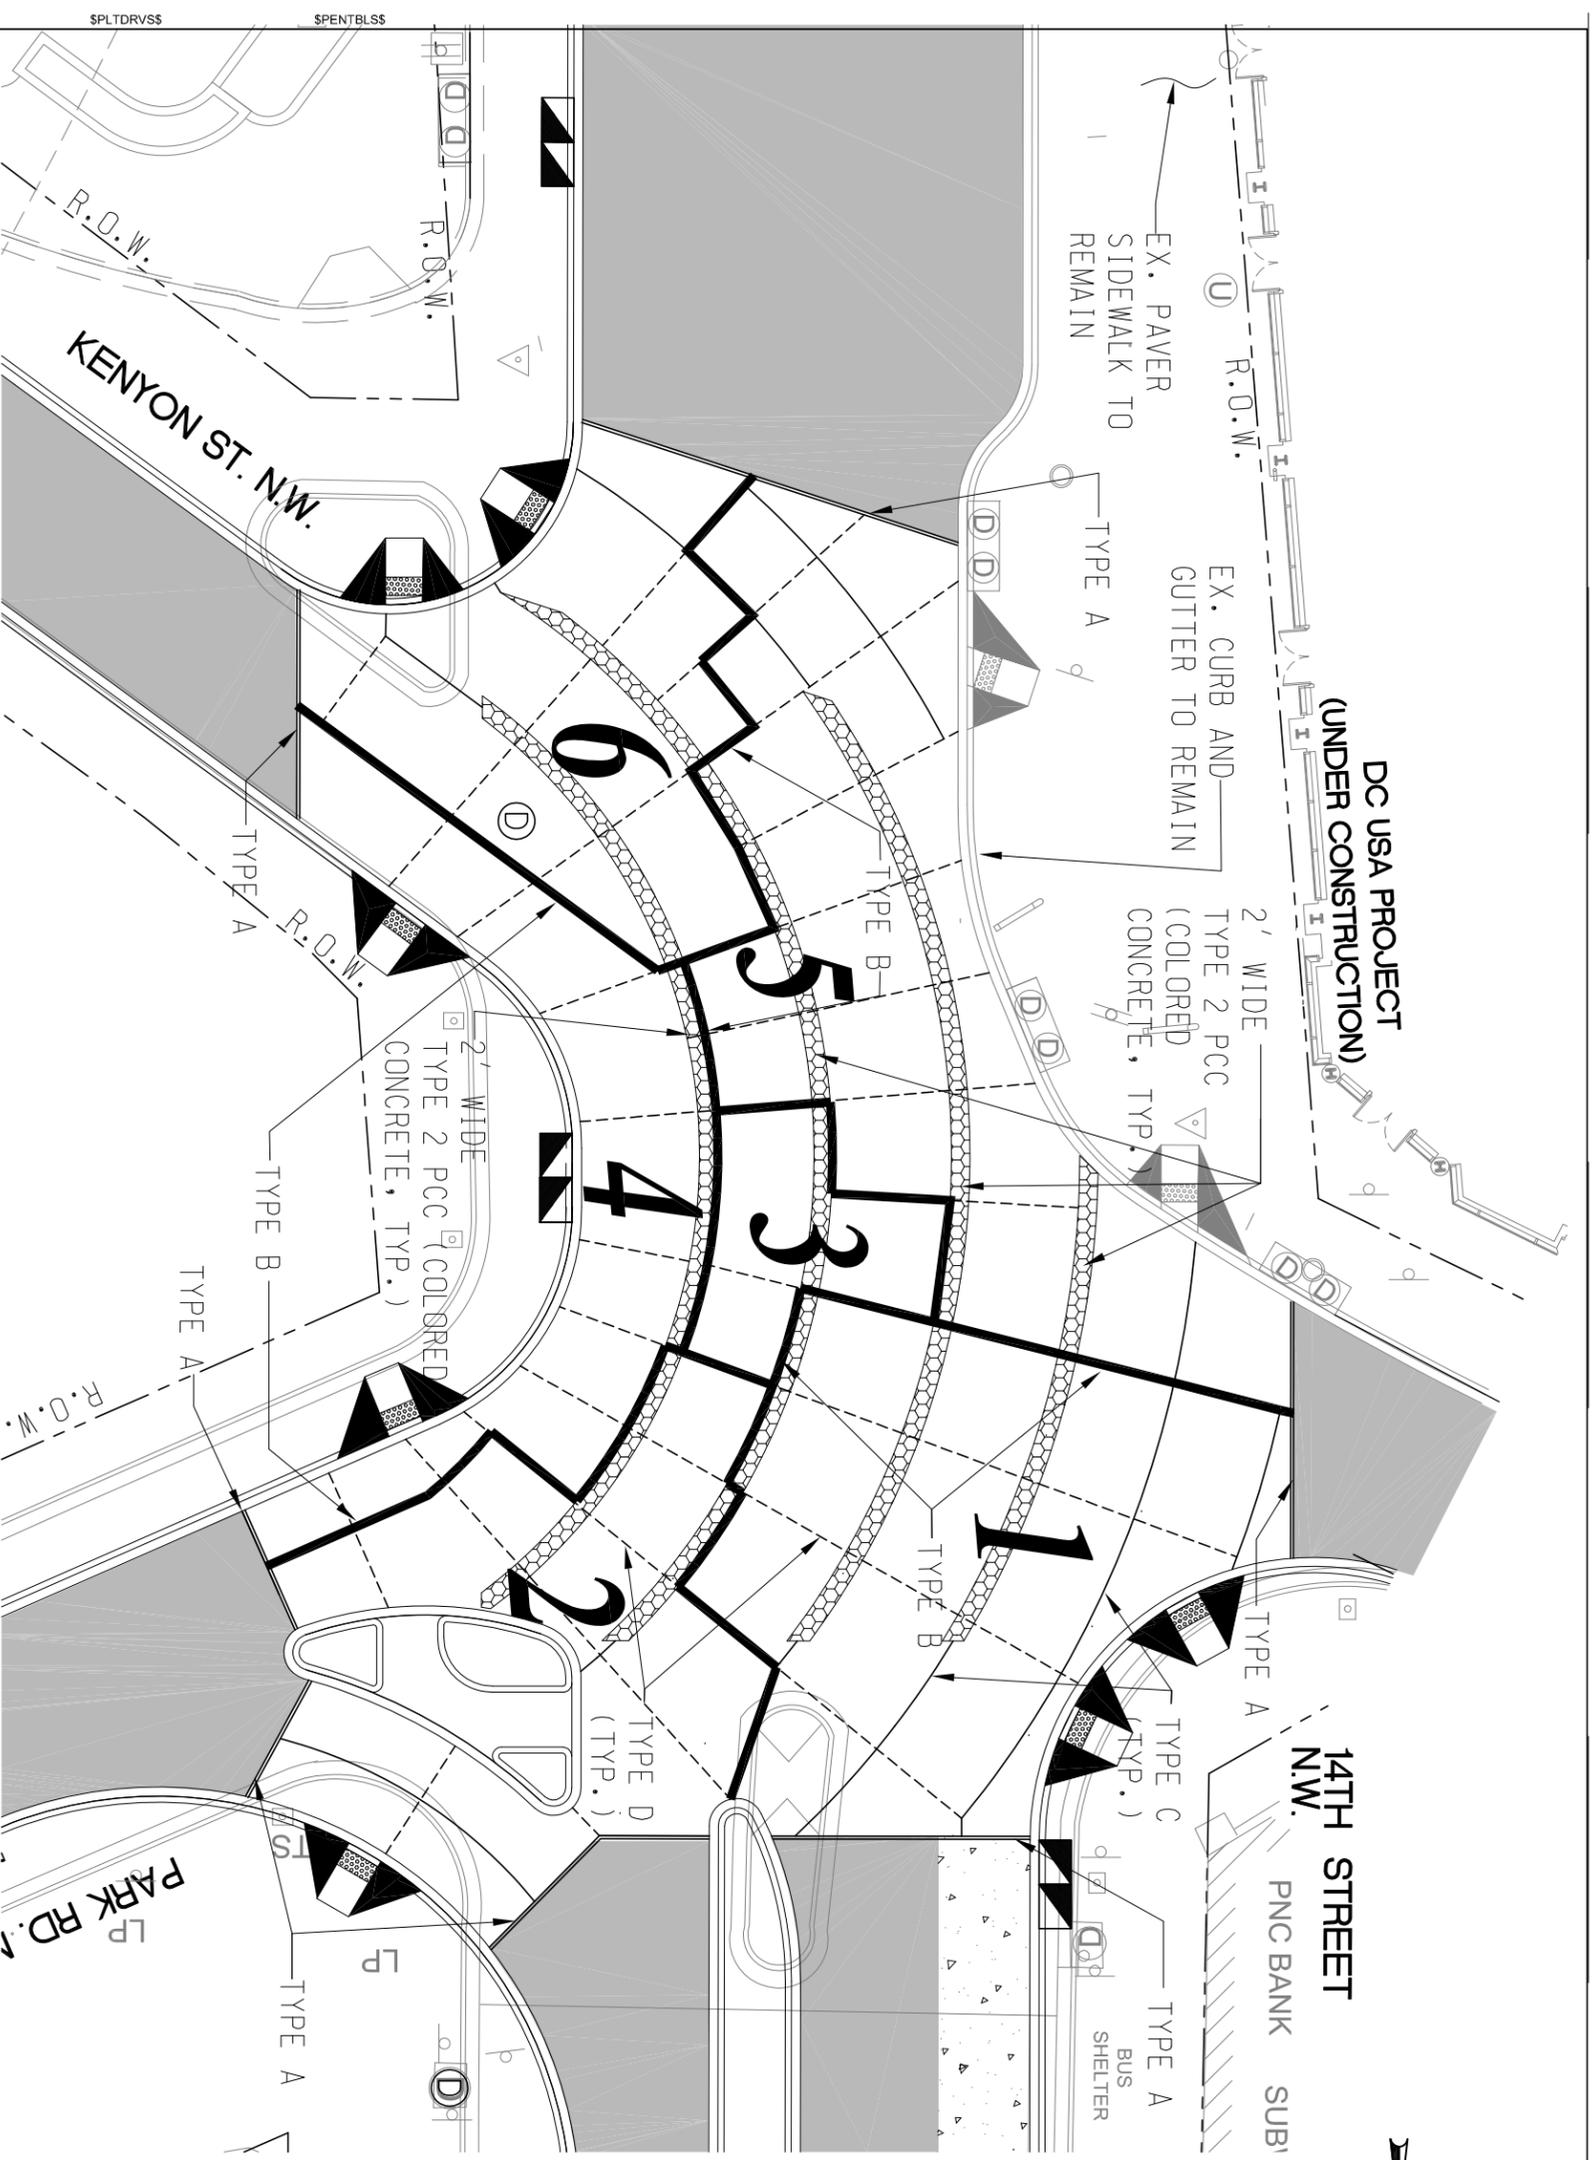

LEGEND

	PCC PAVEMENT TYP. 1 (UNCOLORED)
	ASPHALT PAVEMENT
	CONCRETE BUS PAD
	TYPE A TRANSVERSE EXPANSION JOINT
	TYPE B CONSTRUCTION JOINT
	TYPE C LONGITUDINAL CONTRACTION JOINT
	TYPE D TRANSVERSE CONTRACTION JOINT

- NOTE:**
1. SEE LANDSCAPE PLANS FOR MORE PAVEMENT DETAILS.
 2. SEE TYPICAL SECTIONS ON SHEETS C-12, C-13, C-14 FOR INTERSECTION ON COLOR PAVING BENDS
 3. THE CONSTRUCTION OF THE INTERSECTION IS RECOMMENDED TO FOLLOW IN THE ORDER OF BLOCK #1, 2, 3, 4, 5 AND 6. IN BLOCK #2 CONSTRUCTION, NO LEFT TURN FROM 14TH ST. TO PARK RD (LEAST) IS ALLOWED.
 4. THE CONTRACTOR SHALL COORDINATE WITH THE DCDOT, AND CONDUCT TRAFFIC CONTROL FOR THE INTERSECTION CONSTRUCTION PER DCDOT STANDARDS.

DHA #1693-310 C-25CR

D.C. DEPARTMENT OF TRANSPORTATION
INFRASTRUCTURE PROJECT MANAGEMENT ADMINISTRATION
PROJECT MANAGEMENT DIVISION

COLUMBIA HEIGHTS
STREETSCAPE

PROJECT ENG. BY _____
DESIGNED BY: J.L.
DRAWN BY: SK
PROJECT MGR. J.L.
DIVISION CHIEF


CONCRETE PAVEMENT JOINT PLAN
INTERSECTION PARK RD. & 14TH ST.

NO.	DESCRIPTION	NAME	DATE

DHA
DELOON HAMPTON & ASSOCIATES, Chartered
8403 COLESVILLE ROAD, SUITE 600
SILVER SPRING, MD, 20910-6331
PH:(301) 585-0100 ; FAX:(301) 585-6486



REQ	STATE	PROJECT	SHEET NO.	TOTAL SHEETS
3	D.C.	STP - 2401 (002)	C25BR	176

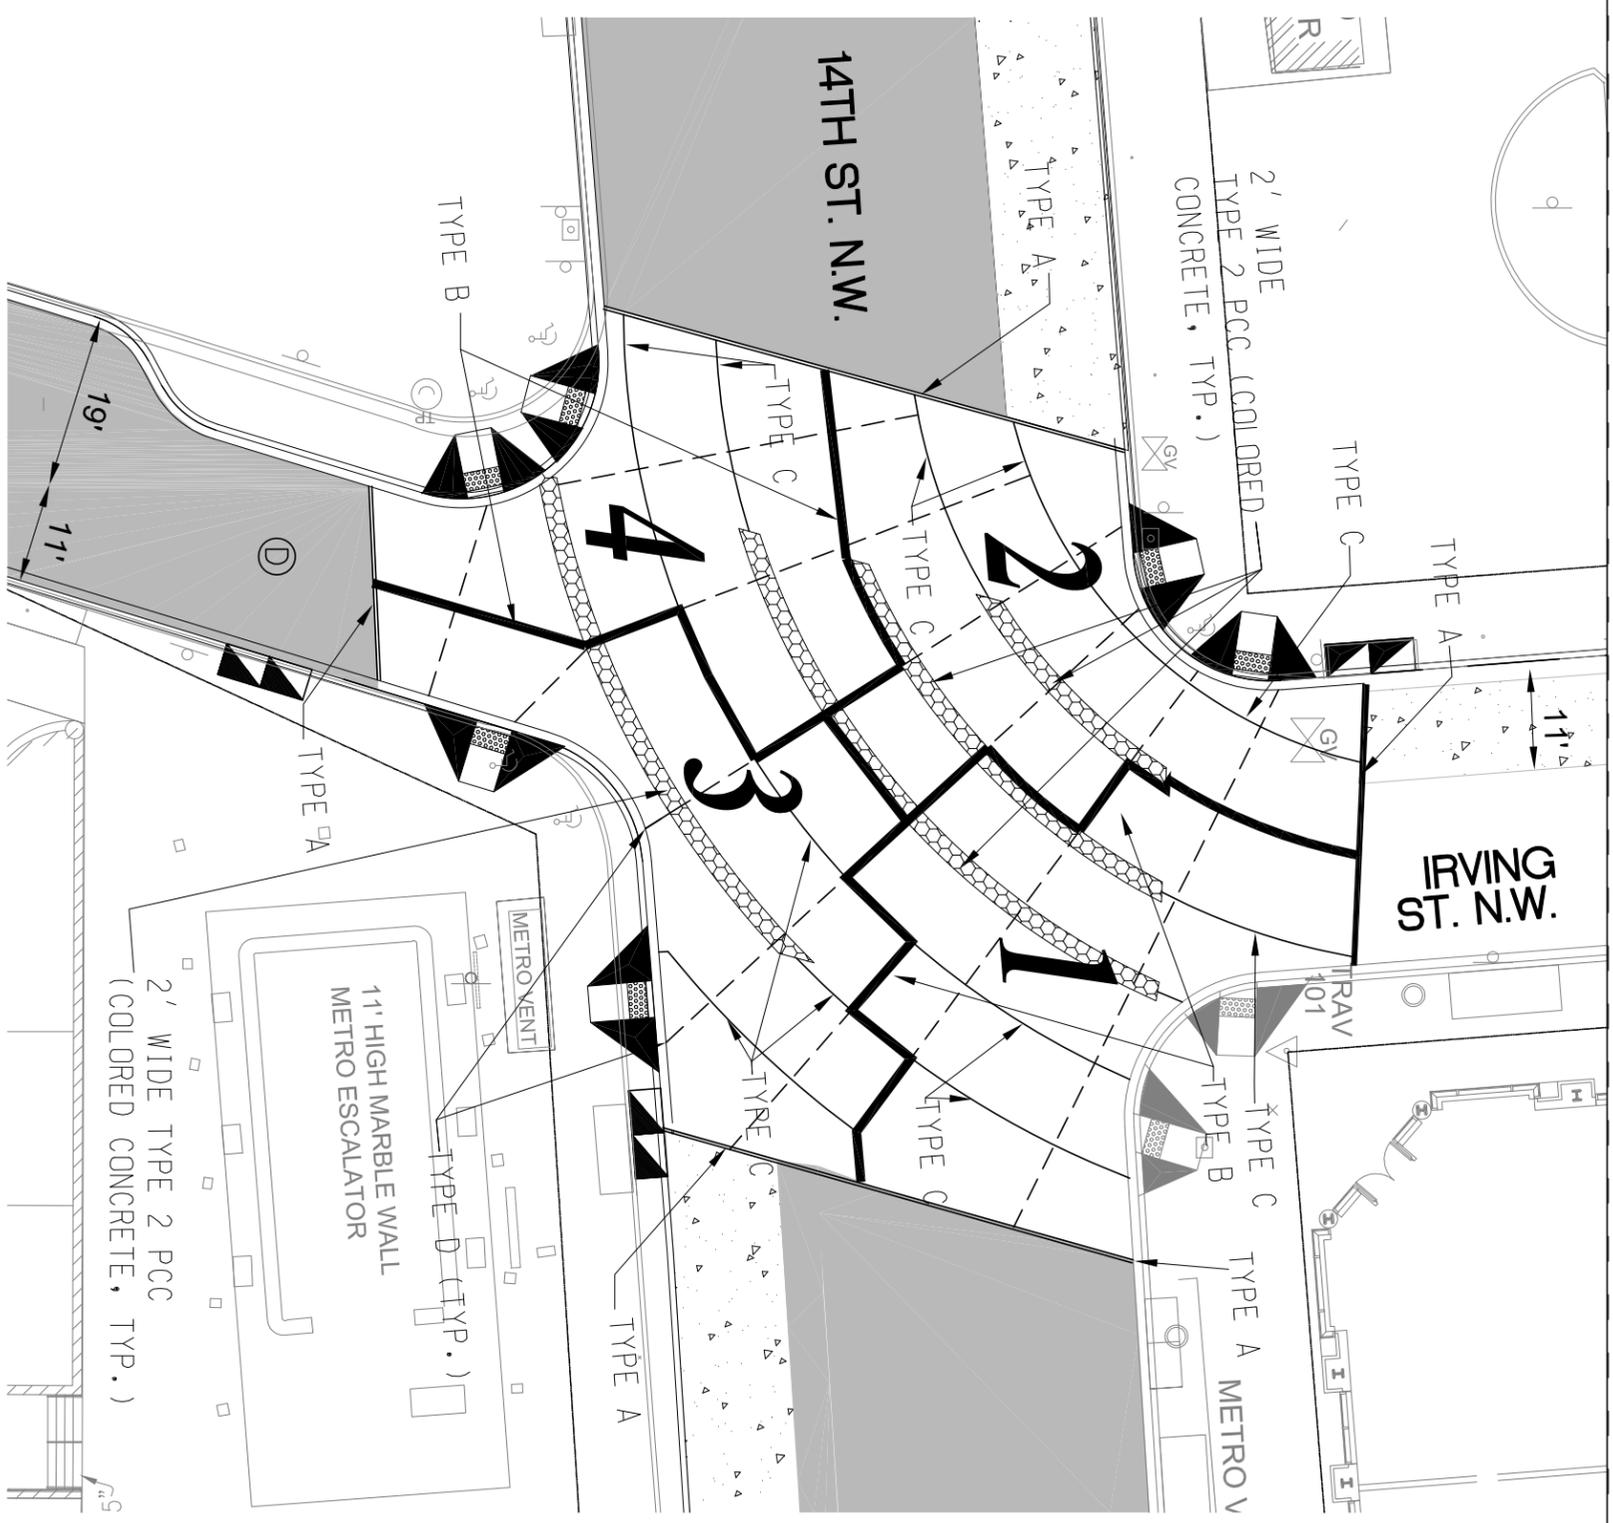

- LEGEND**
- PCC PAVEMENT TYP. 1 (UNCOLORED)
 - ASPHALT PAVEMENT
 - CONCRETE BUS PAD
 - TYPE A TRANSVERSE EXPANSION JOINT
 - TYPE B CONSTRUCTION JOINT
 - TYPE C LONGITUDINAL CONTRACTION JOINT
 - TYPE D TRANSVERSE CONTRACTION JOINT

- NOTE:**
1. SEE LANDSCAPE PLANS FOR MORE PAVEMENT DETAILS.
 2. SEE TYPICAL SECTIONS ON SHEETS C-12, C-13, C-14 FOR INTERSECTION ON COLOR PAVING BENDS
 3. THE CONSTRUCTION OF THE INTERSECTION IS RECOMMENDED TO FOLLOW IN THE ORDER OF BLOCK #1, 2, 3 AND 4.
 4. THE CONTRACTOR SHALL COORDINATE WITH THE DCDOT, AND CONDUCT TRAFFIC CONTROL FOR THE INSCTION CONSTRUCTION PER DODOT STANDARDS.

DHA #1693-310 C-25BR


D.C. DEPARTMENT OF TRANSPORTATION
INFRASTRUCTURE PROJECT MANAGEMENT ADMINISTRATION
PROJECT MANAGEMENT DIVISION

COLUMBIA HEIGHTS
STREETSCAPE

CONCRETE PAVEMENT JOINT PLAN
INTERSECTION IRVING ST. & 14TH ST.

NO.	DESCRIPTION	NAME	DATE

DHA
DELOH HAMPTON & ASSOCIATES, Chartered
8403 COLESVILLE ROAD, SUITE 600
SILVER SPRING, MD. 20910-6331
PH:(301) 585-0100 ; FAX:(301) 585-6486



WAIS Document Retrieval

GENERAL DECISION: DC20080001 07/18/2008 DC1

Date: July 18, 2008

General Decision Number: DC20080001 07/18/2008

Superseded General Decision Number: DC20070001

State: District of Columbia

Construction Types: Heavy (Heavy and Sewer and Water Line) and Highway

County: District of Columbia Statewide.

HEAVY CONSTRUCTION PROJECTS (Including Sewer and Water Lines); HIGHWAY CONSTRUCTION PROJECTS

Modification Number	Publication Date
0	02/08/2008
1	04/18/2008
2	05/02/2008
3	05/09/2008
4	05/30/2008
5	06/06/2008
6	07/04/2008
7	07/18/2008

ASBE0024-001 10/01/2007

	Rates	Fringes
Asbestos Worker/Heat and Frost Insulator		
Includes the application of all insulating materials, protective coverings, coatings and finishes to all types of mechanical systems.....	\$ 27.88	13.88

ASBE0024-002 10/01/2007

Rates Fringes

HAZARDOUS MATERIAL HANDLER

Includes preparation, wetting, stripping, removal, scrapping, vacuuming, bagging and disposing of all insulation materials, whether they contain asbestos or not, from mechanical systems.....\$ 17.95

6.50

ASBE0024-005 10/01/2007

Rates Fringes

Fire Stop Technician.....\$ 22.95 6.39

Includes the application of materials or devices within or around penetrations and openings in all rated wall or floor assemblies, in order to prevent the pasage of fire, smoke of other gases. The application includes all components involved in creating the rated barrier at perimeter slab edges and exterior cavities, the head of gypsum board or concrete walls, joints between rated wall or floor components, sealing of penetrating items and blank openings.

BOIL0193-001 10/01/2007

Rates Fringes

Boilermakers:.....\$ 32.06 16.46

BRDC0001-001 04/30/2007

Rates Fringes

Bricklayer.....\$ 25.90 6.19

CARP0132-001 05/01/2008

Rates Fringes

Carpenter/Lather.....	\$ 25.37	6.55
Piledriver.....	\$ 23.87	7.10

 CARP0132-003 05/01/2004

Rates Fringes

Diver Tender.....	\$ 20.85	5.50
Diver.....	\$ 29.63	5.50

 CARP1831-001 04/01/2003

Rates Fringes

Carpenters:

Millwrights.....	\$ 24.34	4.05
------------------	----------	------

 ELEC0026-001 06/02/2008

Rates Fringes

Electricians.....	\$ 35.55	11.42+a
-------------------	----------	---------

a. PAID HOLIDAYS: New Year's Day, Martin Luther King Jr.'s Birthday, Inauguration Day, Memorial Day, Fourth of July, Labor Day, Veterans Day, Thanksgiving Day, the day after Thanksgiving and Christmas Day or days designated as legal holidays by the Federal Government.

 ELEC0026-008 07/01/2003

Rates Fringes

Motor Repairmen

Removal and reinstallation of electrical motors.....	\$ 23.69	7.73+3%+a
---	----------	-----------

a. PAID HOLIDAYS:
 New Year's Day, Martin Luther King Jr.'s Birthday, Inauguration Day, Memorial Day, Fourth of July, Labor Day, Veterans Day, Thanksgiving Day, the day after Thanksgiving

and Christmas Day or days designated as legal holidays by the Federal Government.

 ELEC0070-001 09/02/2007

Rates Fringes

Line Construction:

Cable Splicers.....	\$ 30.29	19.75%+4.81
Equipment Mechanic.....	\$ 21.82	19.75%+4.81
Equipment Operators.....	\$ 25.78	19.75%+4.81
Groundman/Truck Driver.....	\$ 15.34	19.75%+4.81
Line Truck with Auger.....	\$ 20.09	19.75%+4.81
Linemen.....	\$ 28.86	19.75%+4.81

 ENGI0077-001 05/01/2008

Rates Fringes

Power equipment operators:
 (HEAVY AND HIGHWAY
 CONSTRUCTION)

GROUP 1.....	\$ 29.74	7.17+a
GROUP 2.....	\$ 28.74	7.17+a
GROUP 3.....	\$ 28.28	7.17+a
GROUP 4.....	\$ 27.57	7.17+a
GROUP 5.....	\$ 25.54	7.17+a
GROUP 6.....	\$ 21.00	7.17+a
GROUP 7.....	\$ 30.11	7.17+a

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Tower Cranes and Cranes 100 ton and over.

GROUP 2: 35 ton cranes & above, tower & climbing cranes, derricks, concrete boom pump, drill rigs (equivalent to L & Double L), mole.

GROUP 3: Backhoes, cableways, cranes, cherry pickers, elevating graders, hoists, paving mixers, power shovels, tunnel shovels. batch plants, shields, tunnel mining machines, gradalls, front end loaders, 3 1/2 cu. yds. and above, power driven wheel scoops and scrapers (50

cu. yds. struck capacity or above), rail tamper, draglines, boomcat, mucking machines, graders in tunnels, pile driving engines.

GROUP 4: Front end loaders below 3 1/2 cu. yds, boom trucks, hydraulic backhoes 1/2 yds. capacity or below rubber or track mounted, tug boats, power driven wheel scoops & scrapers, blade graders, motor graders, bulldozers, trenching machines, concrete mixer, speed swing pettibone, ballast regulator, concrete pump, mechanic, welder, mechanic welder, shotcrete machines, Hoeram, locomotive (standard, narrow gauge), tuggers.

GROUP 5: High lifts above 10 feet, boilers (skelton), asphalt spreaders, bullfloat finishing machines, concrete finishing machines, concrete spreaders, fine graders, air compressors, welding machines, pumps, generators, well points, deep wells, hydraulic pumps, elevators, freeze uniits, tunnel motorman or dinky operator, roller, conveyors, well drilling machines, grout pump, fireman.

GROUP 6: Fork lifts, ditch witch, bobcat 1/3 cu. yd. and below, space heaters, sweepers, assistant engineers, oilers.

GROUP 7: Master mechanic.

a. PAID HOLIDAYS: New Years Day, Inaugural Day, Decoration Day, Independence Day, Labor Day, Martin Luther King's Birthday, Veterans' Day, Thanksgiving Day, Friday after Thanksgiving and Christmas Day.

ENGI0077-002 06/01/2008

Rates Fringes

Power equipment operators:
(PAVING AND INCIDENTAL
GRADING)

GROUP 1.....	\$ 23.75	5.75
GROUP 2.....	\$ 20.80	5.75
GROUP 3.....	\$ 17.84	5.75
GROUP 4.....	\$ 16.35	5.75
GROUP 5.....	\$ 24.26	5.55

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Gradall operator, Crane.

GROUP 2: Boom Truck, Milling Machine, Excavator, Rubber Tire Backhoe, Asphalt Paver, Asphalt Plant Engineer, Motor Grader, Track Loader, Rubber Tire Loader, Track Dozer, Concrete Paver.

GROUP 3: Broom Truck, Asphalt Roller.

GROUP 4: Air Compressor, Grade Rollers.

GROUP 5: Mechanic.

ENGI0077-003 07/01/2008

Rates Fringes

Power equipment operators:
(SEWER, GAS AND WATER LINE
CONSTRUCTION)

GROUP 1.....	\$ 21.58	5.62+a
GROUP 2.....	\$ 21.18	5.62+a
GROUP 3.....	\$ 20.67	5.62+a
GROUP 4.....	\$ 20.35	5.62+a
GROUP 5.....	\$ 19.53	5.62+a

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Excavators, Cranes, Gradalls.

GROUP 2: Backhoes, Front-end Loaders, Fork alift/Lull, Bulldozers, Motor Graders. Qualified Mechanics, Hydraulic Tamper and Hoe Pack, Paving Mixers, Pile Driving Engines, Batch Plant, Concrete Pumps, Low-Boy Driver, Lube Truck.

GROUP 3: Trenching Machine, Well Drilling Machines, Concrete Mixers, Motor Graders, Truck Driver.

GROUP 4. Roller, Air Compressors, Pumps, Welding Machines, Well Points, Firemen.

GROUP 5: Oiler

a.PAID HOLIDAYS: New Year's Day, Inaugural Day, Washington's

Birthday, Decoration Day, Independence Day, Labor Day, Veterans Day, Thanksgiving Day, Christmas Day and Martin Luther King's Birthday.

 * IRON0005-001 06/01/2008

Rates Fringes

Ironworkers:

Structural, Ornamental and
 Chain Link Fence.....\$ 27.83 12.595

 IRON0201-001 05/01/2008

Rates Fringes

Ironworkers:

Reinforcing.....\$ 26.15 12.08

 LABO0657-003 06/01/2008

Rates Fringes

Laborers: (HEAVY AND HIGHWAY
 AND SEWER & WATER LINES
 CONSTRUCTION)

GROUP 1.....	\$ 20.42	4.68
GROUP 2.....	\$ 20.72	4.68
GROUP 3.....	\$ 20.88	4.68
GROUP 4.....	\$ 21.04	4.68
GROUP 5.....	\$ 21.47	4.68
GROUP 6.....	\$ 22.01	4.68
GROUP 7.....	\$ 22.53	4.68
GROUP 8.....	\$ 23.23	4.68

LABORERS CLASSIFICATIONS:

GROUP 1: Carloaders, choker setter, concrete crewman, crushed feeder, demolition laborers, including salvaging all material, loading, cleaning up, wrecking, dumpmen, flagmen, fence erector and installer (other than chain link), including installation and erection of fence, guard rails, medial rails, reference posts, guide posts and right-of-way markers, form strippers, general laborers, railroad track laborers, riprap

man, scale man, stake jumper, structure mover, includes foundation, separation, preparation, cribbing, shoring, jacking and unloading of structures, water nozzleman, timber buckler and faller, truck loader, water boys, tool room men.

GROUP 2: Combined air and water nozzleman, cement handler, dope pot fireman (nonmechanical), form cleaning machine, mechanical railroad equipment (includes spiker, puller, tile cleaner, tamper, pipe wrapper, power driven wheelbarrows, operators of hand derricks, towmasters, scootcretes, buggymobiles and similar equipment), tamper or rammer operator, trestle scaffold builders over one tier high, power tool operator (gas, electric or pneumatic), sandblast or gunnite tailhose man, scaffold erector, (steel or wood), vibrator operator (up to 4 feet), asphalt cutter, mortar men, shorer and lagger, creosote material handler, corrosive enamel or equl, paver breaker and jackhammer operators.

GROUP 3: Multi-section pipe layer, non-metallic clay and concrete pipe layer (including caulker, collarman, jointer, rigger and jacker, thermal welder and corrugated metal culvert pipe layer.

GROUP 4: Asphalt block pneumatic cutter, asphalt roller, walker, chainsaw operator with attachment, concrete saw (walking), high scalers, jackhammer operator (using over 6 feet of steel), vibrator operator (4 feet and over), well point installer, air trac operator.

GROUP 5: Asphalt screeder, big drills, cut of the hole drills (1 1/2 " piston or larger), down the hole drills (3 1/2" piston or larger) gunnite or sandblaster nozzleman, asphalt raker, asphalt tamper, form setter, demolition torch operator, shotcrete nozzlemen and potman.

GROUP 6: Powderman, master form setters.

GROUP 7: Brick paver (asphalt block paver, asphalt block sawman, asphalt block grinder, hastings block or similar type)

GROUP 8: Licensed powdermen.

LABO0657-004 06/01/2008

Rates Fringes

Laborers: (HAZARDOUS WASTE REMOVAL, EXCEPT ON MECHANICAL SYSTEMS:

Preparation for, removing and encapsulation of hazardous materials from non-mechanical systems)

Skilled Asbestos Abatement Laborers.....	\$ 16.93	4.68
Skilled Toxic and Hazardous Waste Removal Laborers.....	\$ 19.80	4.68

LABO0657-005 06/01/2008

Rates Fringes

Laborers: (TUNNEL, RAISE & SHAFT (FREE AIR) FOR HEAVY AND SEWER & WATER LINES CONSTRUCTION)

GROUP 1.....	\$ 21.11	4.68
GROUP 2.....	\$ 21.74	4.68
GROUP 3.....	\$ 23.34	4.68
GROUP 4.....	\$ 24.02	4.68

LABORERS CLASSIFICATIONS:

GROUP 1: Brakeman, Bull Gang, Dumper, Trackmen, Concrete Man.

GROUP 2: Chuck Tender, Powdermen in Prime House, Form Setters and Movers, Nippers, Cableman, Houseman, Groutman, Bell or Signalman, Top or Bottom Vibrator Operator.

GROUP 3: Miners, Re-Bar Underground, Concrete or Gunnite Nozzlemen, Powdermen, Timbermen and Re-Timbermen, Wood Steel Including Liner plate or Other Support, Material Motorman, Caulkers, Diamond Drill Operators, Riggers, Cement Finishers-Underground, Welders and Burners, Shield Driver, Air Trac Operator, Shotcrete Nozzlemen and Potman.

GROUP 4: Mucking Machine Operator (Air).-----
LABO0657-006 06/01/2008

Rates Fringes

Laborers: (TUNNEL, RAISE AND
SHAFT (COMPRESSED AIR) FOR
HEAVY CONSTRUCTION ONLY

Gauge Pressure Work Period

(Pounds)	(Hours)		
1-14	7.....	\$ 26.39	4.68
14-18	6.....	\$ 31.05	4.68

FOOTNOTE: On any requirement for air pressure in excess of 18
PSI, work periods and rates should be negotiated at a
pre-bid conference.

LABO0657-007 06/01/2007

Rates Fringes

Laborers: (PAVING AND
INCIDENTAL GRADING)

Asphalt Raker & Concrete			
Saw Operator.....	\$ 17.14		4.30
Asphalt Shoveler.....	\$ 16.59		4.30
Asphalt Tammer & Concrete			
Shoveler.....	\$ 16.84		4.30
Jack Hammer.....	\$ 17.03		4.30
Laborer.....	\$ 16.48		4.30
Sand Setter & Form Setter...	\$ 17.76		4.30

LABO0657-008 06/01/2008

Rates Fringes

LABORERS (BRICK MASONRY WORK)

Mason Tenders.....	\$ 14.65		4.68
Scaffold Builders, Mortarmen and Small Equipment Operators.....	\$ 15.45		4.68

MARB0002-003 05/01/2007

	Rates	Fringes
--	-------	---------

Marble & Stone Mason

Includes Pointing, Caulking and Cleaning of All Types of Masonry, Brick, Stone and Cement Structures.....	\$ 31.00	11.52
---	----------	-------

MARB0003-001 05/01/2007

	Rates	Fringes
--	-------	---------

Mosaic & Terrazzo Worker,
Tile Layer

Marble Mason and Tile Layer.	\$ 24.67	8.78
Terrazzo Worker.....	\$ 25.42	8.78

MARB0003-004 05/01/2007

	Rates	Fringes
--	-------	---------

Marble, Tile & Terrazzo

Finisher.....	\$ 19.84	7.90
---------------	----------	------

PAIN0051-001 06/01/2008

	Rates	Fringes
--	-------	---------

Painters:

All Industrial Work.....	\$ 25.73	7.56
Bridges, Heavy Highway, Lead Abatement and Flame/Thermal Spray.....	\$ 29.12	7.56
Commercial and Mold Remediation, Painters, Wallcovers and Drywall Finishers.....	\$ 24.31	7.56
Metal Polishing and Refinishing.....	\$ 25.31	7.56

 PLAS0891-001 05/01/2007

	Rates	Fringes
--	-------	---------

Cement Masons:

HEAVY CONSTRUCTION ONLY.....	\$ 26.15	6.01
------------------------------	----------	------

PLAS0891-002 06/01/2007

	Rates	Fringes
--	-------	---------

Cement Masons: (PAVING & INCIDENTAL GRADING)

Cement Masons.....	\$ 17.35	4.35
Concrete Saw Operators.....	\$ 17.35	4.35
Form Setters.....	\$ 17.35	4.35

PLUM0005-001 10/21/2007

	Rates	Fringes
--	-------	---------

Plumbers.....	\$ 33.92	12.94+a
---------------	----------	---------

a. PAID HOLIDAYS: Labor Day, Veterans' Day, Thanksgiving Day and the day after Thanksgiving, Christmas Day, New Year's Day, Martin Luther King's Birthday, Memorial Day and the Fourth of July.

PLUM0602-005 11/01/2007

	Rates	Fringes
--	-------	---------

Steamfitter, Refrigeration &

Air Conditioning Mechanic.....	\$ 33.27	13.57+a
--------------------------------	----------	---------

a. PAID HOLIDAYS: New Year's Day, Martin Luther King's Birthday, Memorial Day, Independence Day, Labor Day, Veterans Day, Thanksgiving Day and the day after Thanksgiving and Christmas Day.

SHEE0100-001 07/01/2008

Rates Fringes

Sheet Metal Worker.....\$ 33.04 12.12

TEAM0639-001 03/07/2004

Rates Fringes

Truck drivers: (HEAVY & HIGHWAY CONSTRUCTION)

Tandem & Triaxle (3 or more axles, including steering axle).....\$ 16.00 5.82+a
 Tractor-trailer, Low Boy....\$ 20.00 5.82+a

a. VACATION: Employees will receive one (1) week's paid vacation after one (1) year of service.

TEAM0639-002 06/01/2005

Rates Fringes

Truck drivers: (HEAVY & HIGHWAY CONSTRUCTION)

Concrete Mixer Drivers.....\$ 17.40 5.82+a+b

a. PAID HOLIDAYS: New Year's Day, Martin Luther King, Jr. Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day, Christmas Day, or any day celebrated publicly in the District of Columbia as one of the above holidays.

b. PAID VACATIONS: Employees with one (1) year of service shall be entitled to a vacation of one (1) week; five (3) years of service are entitled to two (2) weeks; fifteen(10) years of service are entitled to three 3 weeks; twenty (20) years of service are entitled to four (4) weeks.

TEAM0639-005 09/01/2006

Rates Fringes

Truck drivers: (PAVING & INCIDENTAL GRADING)

All paving projects where
the grading is incidental
to the paving.....\$ 14.05 3.69

WELDERS - Receive rate prescribed for craft performing
operation to which welding is incidental.
=====

Unlisted classifications needed for work not included within
the scope of the classifications listed may be added after
award only as provided in the labor standards contract clauses
(29CFR 5.5 (a) (1) (ii)).

In the listing above, the "SU" designation means that rates
listed under the identifier do not reflect collectively
bargained wage and fringe benefit rates. Other designations
indicate unions whose rates have been determined to be
prevailing.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can
be:

- * an existing published wage determination
- * a survey underlying a wage determination
- * a Wage and Hour Division letter setting forth a position on
a wage determination matter
- * a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests
for summaries of surveys, should be with the Wage and Hour
Regional Office for the area in which the survey was conducted
because those Regional Offices have responsibility for the
Davis-Bacon survey program. If the response from this initial
contact is not satisfactory, then the process described in 2.)
and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

=====

END OF GENERAL DECISION