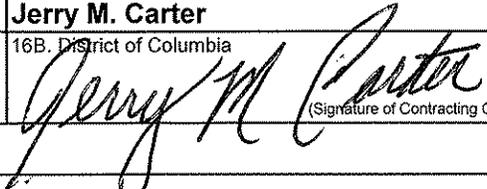


<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>			1. Contract Number	Page of Pages 1 of 10	
2. Amendment/Modification Number <b>Amendment No. 5</b>		3. Effective Date See Block 16C	4. Requisition/Purchase Request No.	5. Solicitation Caption: <b>Reconstruction of Nannie Helen Burroughs Ave, NE</b>	
6. Issued By: District Department of Transportation Office of Contracting and Procurement 2000 14th Street, N.W. 6th Floor Washington, D.C. 20009		Code 750-21-61	7. Administered By (If other than line 6) Office of Contracting and Procurement Bid Room Frank D. Reeves Municipal Center 2000 14th Street, N.W., 3rd Floor Washington, D.C. 20009		
8. Name and Address of Contractor (No. Street, city, country, state and ZIP Code)			(X)	9A. Amendment of Solicitation No. <b>DCKA-2010-B-0154</b>	
				9B. Dated (See Item 11) <b>8/19/2010</b>	
				10A. Modification of Contract/Order No.	
				10B. Dated (See Item 13)	
Code	Facility		11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS		
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers <input type="checkbox"/> is extended. <input checked="" type="checkbox"/> is not extended. Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or fax which includes a reference to the solicitation and amendment number. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or fax, provided each letter or telegram makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.					
12. Accounting and Appropriation Data (If Required)					
13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14					
A. This change order is issued pursuant to: (Specify Authority) The changes set forth in item 14 are made in the contract/order no. in item 10A.					
B. The above numbered contract/order is modified to reflect the administrative changes (such as changes in paying office, appropriation date, etc.) set forth in item 14, pursuant to the authority of 27 DCMR, Chapter 36, Section 3601.2.					
C. This supplemental agreement is entered into pursuant to authority of:					
D. Other (Specify type of modification and authority)					
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input checked="" type="checkbox"/> is required to sign this document and return <u>1</u> copies to the issuing office.					
14. Description of amendment/modification (Organized by UCF Section headings, including solicitation/contract subject matter where feasible.) <b>The purpose of this Amendment is to inform interested prospective vendors of the following information:</b>					
<b>RECONSTRUCTION OF NANNIE HELEN BURROUGHS AVENUE, NE FROM MINNESOTA AVENUE TO EASTERN AVENUE (ARRA PROJECT)</b>					
Attached are Responses (3-pages) to Questions from prospective bidders. Insert Tax Certification Affidavit Insert the ARRA Sign Details Appendix (5 pages)					
No additional questions will be accepted and the Bid Opening Date will not be extended.					
Except as provided herein, all terms and conditions of the document referenced in Item (9A or 10A) remain unchanged and in full force and effect					
15A. Name and Title of Signer (Type or print)			16A. Name of Contracting Officer <b>Jerry M. Carter</b>		
15B. Name of Contractor  (Signature of person authorized to sign)		15C. Date Signed	16B. District of Columbia  (Signature of Contracting Officer)		16C. Date Signed <b>9/8/2010</b>

## RESPONSES TO PRE-BID QUESTIONS

1. Progress photo – Special Provisions (SP)  
Total photos – what is the required quantity “250 or 800”. Please clarify.  
*Response: The total number of photographs required is Eight Hundred (800).*
  
2. No pay item, quantity, and detail provided for “Guardrail”. See sheet 35/DDOT std.605.08/match existing  
*Response: The End Terminal-straight layout (DDOT STD. NO:605.29) and W-Beam trailing Terminal End Section (DDOT STD.No: 605.08) will not be measured for payment and shall be considered as contingent to the Item 202 002. COMMON EXCAVATION.*
  
3. No pay item and quantity provided for “Permanent Lane Marking Symbols”.  
*Response: See response on No. 4*
  
4. “Permanent lane marking daimonds” – pay item and quantity was provided. But no plans/details were provided for this scope of work.  
*Response: This item is for “Thermoplastic Pavement Symbols”. The Bike Symbols as per drawings shall be paid under this item.*
  
5. “Permanent Lane marking Arrow” quantity “8.5” (decimal number ILO integer number) with a unit of “each”. Please clarify. (Turn arrow and/ or Merge arrow)  
*Response: The item will be measured and paid in units of EACH in whole numbers.*
  
6. No pay item and quantity provided for pcc thrust blocks for 12-inch and less DIP.  
*Response: Cost for PCC thrust blocks other than in-line thrust block will be incidental to the cost of pipe. See Section 322. Measurement and Payment: Thrust blocks will not be paid for separately but are to be included in the price of the details where they are shown*
  
7. No pay item and quantity provided “16-inch dia Thrust Blocks”/caison. See dwg. Sheet 110 for 16-inch thrust block schedule and detail. This scope should not be classified as incidental.  
In addition, 16-inch Tee /16-inch dia thrust block on dwg. Sheet 88 (sta 49+20) was not included in “16-inch Dia. Thrust Block schedule” on dwg sheet 110. Please clarify.  
*Response: The Caissons are considered part of the Thrust Block and will not be paid for separately but are to be included in the price of the details where they are shown.*
  
8. Dwg. Sheet 88 – EW-1 and CB 9-4 reference “sheet 246 for Detail”. Reference Detail should be sheet 250.  
*Response: Agreed. The reference should be Sheet 250.*
  
9. Line item 650 (page 7) “PCC overlay for Bus Stop Pad” shows a min. of 2-inch. How much inches of pcc is required. Need a limit or range in order to price.

*Response: The range is 2" to 3"*

10. Roadway (rwy) Comm. Exc. typical was only provided (from sta 85+99 to sta 86+15). Where the remaining typical sections only show mill and overlay or just overlay. However, the rwy profile dwgs. shows a delta of 12 inches btw the existing rwy profile and proposed rwy profile at the following stations: (sta 27+50 to sta 28+50 / sta 30+00 to sta 32+00 / sta 33+00 to sta 37+00 / sta 37+75 to sta 41+00 / sta 45+75 to sta 50+50). Indicating the existing rwy is higher than the proposed rwy. Please clarify or provide additional information on achieving the proposed rwy.

*Response: The locations mentioned in the question are at the existing medians.*

11. Note #7 on sheet 32 possible conflict btw curb to remain and elec work under s/w on the ss rwy. Please clarify.

*Response: It will be Contractor's responsibility to protect or restore the existing features if damaged by the construction.*

12. Line item 1050 – what is the tree size? “2 – 2.5 ft. ht. or 2 – 2.5 inch cal.” Please clarify.

*Response: The tree size is 2 – 2 ½ Ft. Ht.*

13. Line item 1170 – what is the tree size? “1 2/4 – 2 inch cal. or 1.75 – 2 inch cal.” Please clarify.

*Response: The tree size is 1 ¾ - 2 INCH cal.*

14. Line item 1180 – what is the tree size? “2 – 2.5 inch cal.” Please clarify.

*Response: The tree size is 2 – 2 ½ INCH, cal.*

15. Line item 1400 – “Steel plate protection” – what is the size of steel plate? Please clarify.

*Response: See Section 616.19 of Standard Specifications*

16. Line item 1550 & Line item 1910 – “3x3x3 MH”. Please clarify – if duplicated (SL / TS)

*Response: The manhole on line item 1550 is for the traffic signals and the manhole on line item 1910 is for street light.*

17. Line item 1560 & Line item 1920 – “4x4x4 MH”. Please clarify – if duplicated (SL / TS)

*Response: The manhole on line item 1560 is for the traffic signal and the manhole on line item 1920 is for street light.*

18. Line item 1900 & Line item 2160 – “traffic sign panel”. Please clarify - if duplicated

*Response: Line item 1900 is for signs attached to the Traffic Signal. Line item 2160 is for roadway signs.*

19. Line item 2100 – “Furnish 8lf arm for wood pole ...”. Please clarify why 8lf arm.

*Response: See sheet 280 of 319*

20. Line item 2210 – “DC Project sign”. Please clarify how many?

*Response: There should be 2 signs.*

21. DDOT is requiring projects to install signs through out the work zone stating "Fines will be doubled" if caught exceeding the speed limit in the work zone. Please clarify, if applicable to this project.

*Response: The sign mentioned may be needed and will be paid for under appropriate item.*

22. Sheet 87 – sta 43+ 00 to sta 44+00 "Abandoned conc. culvert" is this an abandoned underground tunnel crossing the rwy. If so, is there any detail provided, possible conflict with new work. Please clarify.

*Response: There are no details included other than what is shown on the plans. Contractor shall coordinate with WASA and /or perform test pits to determine the exact location of the abandoned culvert prior to start of any excavation for laying the drainage pipe. The contractor shall submit his method of laying and supporting the pipe and get it approved by the Chief Engineer before starting this work. The additional cost associated with laying the pipe across the abandoned culvert shall be included in the Item PCC pipe, Class III, Gasket, 18 Inch.*

23. Pepco 230KV system mainly along the ns rwy curb lane. Has Pepco started or completed this work? If not, is there a coordination plan in place. Please clarify.

*Response: Please refer to SP NO. 8. UTILITY STATUS for contractor's responsibility to coordinate.*

24. 54" + 10" storm/sanitary work by others. Has the other contractor started or completed this work. If not, is there a coordination plan in place. Please clarify.

*Response: Please refer to SP NO. 8. UTILITY STATUS for contractor's responsibility to coordinate*

25. Is there any DBE requirement for this project? If so, what is the goal?

*Response: The DBE Goal for this project is 12%.*

26. No pay item and quantity was provided for "Bio-retention ponds". Please clarify

*Response: The payments for the Bio-retention ponds A and B are included in the Line Items: 0120, 0130, 0190, 0380, 0550, 0070, 0680, 0840, 0850, 0870 and 0860. No measurement and payment will be made for Geo-textile Fabric as per SP. No. 29. Planting, as per plans as well as yard inlets A and B and other incidental items required to complete work will not be measured and paid for separately and the costs thereof shall be included under the above items.*

27. Special Provision - states the curb inlets and depressed gutters are incidental to Bio-retention Planter. Same for Bio-retention cells and Grassed swale. Please clarify and/or identify specific inlet.

*Response: Please see Sheet 97 for I-1, I-2, I-3 and I-4 as well as Sheet 99 for I-5 and O-1.*

28. Special Provisions –Bio-swale- unit of payment is sq yds ... why do we include the Pcc work in to this scope ... Please clarify

*Response: It is included since it is an integral part of the item.*

**GOVERNMENT OF THE DISTRICT OF COLUMBIA**

**Office of the Chief Financial Officer**

**Office of Tax and Revenue**



**TAX CERTIFICATION AFFIDAVIT**

**THIS AFFIDAVIT IS TO BE COMPLETED ONLY BY THOSE WHO ARE REGISTERED TO CONDUCT BUSINESS IN THE DISTRICT OF COLUMBIA.**

**Date**

**Authorized Agent  
Name of Organization/Entity  
Business Address (include zip code)  
Business Phone Number**

**Authorized Agent  
Principal Officer Name and Title  
Square and Lot Information  
Federal Identification Number  
Contract Number  
Unemployment Insurance Account No.**

I hereby authorize the District of Columbia, Office of the Chief Financial Officer, Office of Tax and Revenue to release my tax information to an authorized representative of the District of Columbia agency with which I am seeking to enter into a contractual relationship. I understand that the information released will be limited to whether or not I am in compliance with the District of Columbia tax laws and regulations solely for the purpose of determining my eligibility to enter into a contractual relationship with a District of Columbia agency. I further authorize that this consent be valid for one year from the date of this authorization.

I hereby certify that I am in compliance with the applicable tax filing and payment requirements of the District of Columbia. The Office of Tax and Revenue is hereby authorized to verify the above information with the appropriate government authorities.

**Signature of Authorizing Agent**

**Title**


The penalty for making false statement is a fine not to exceed \$5,000.00, imprisonment for not more than 180 days, or both, as prescribed by D.C. Official Code §47-4106.

**PROJECT FUNDING SOURCE SIGN ASSEMBLY  
AMERICAN RECOVERY AND REINVESTMENT ACT  
SIGN LAYOUT DETAILS**



PROJECT FUNDING SOURCE  
SIGN ASSEMBLY

# PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

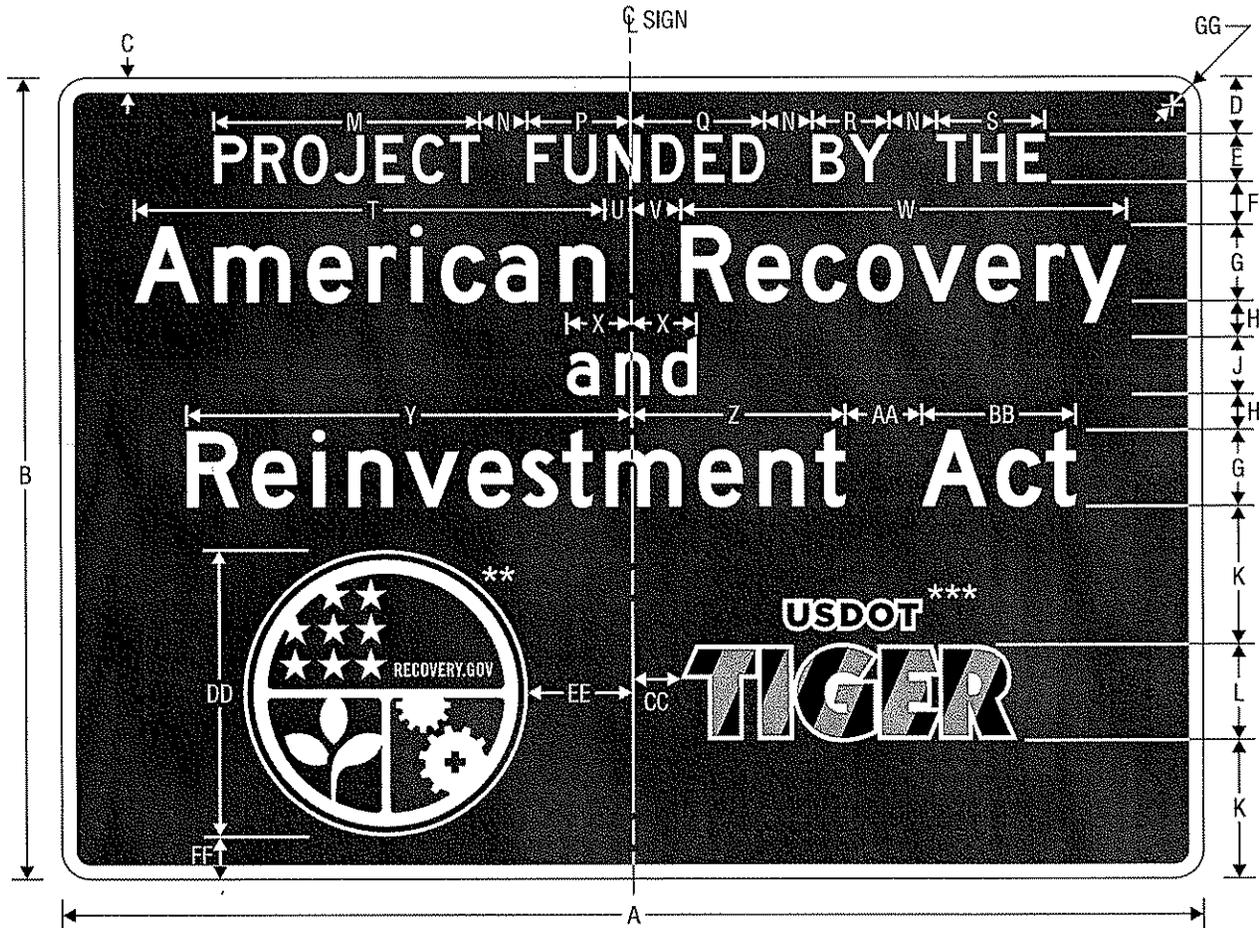

PROJECT FUNDING SOURCE SIGN

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE (SEE SHEET 3).

Dimensions in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	84	1.5	6	5 D	4.5	8 D*	3.75	6 D* (45 LC)	14.5	10	27.917	5	10.831
84	60	1	5	4 C	3.5	6 C*	3	4 D* (β LC)	9.25	7	19.047	4	7.362


Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
14.087	8.106	11.556	49.42	2.742	5.258	46.904	6.812	46.76	22.472	8	16.288	5	30
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	4	21

EE	FF	GG
11	4.5	3
7.5	2.25	2.25

- \* Increase character spacing 50%
- \*\* See Pictograph page 4
- \*\*\* See Pictograph page 5

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)  
BACKGROUND — GREEN (RETROREFLECTIVE)

# PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

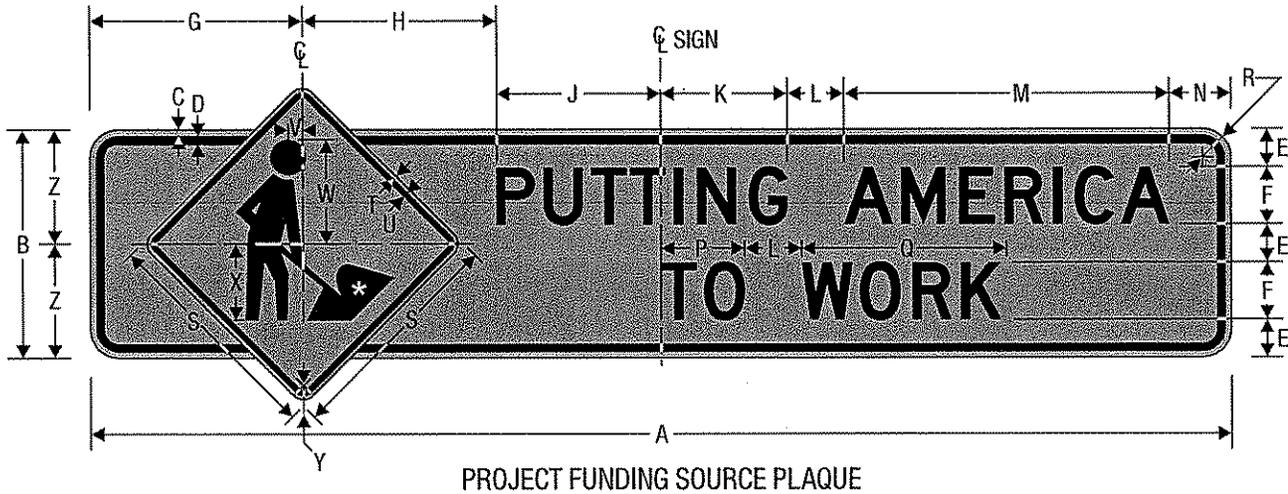

NOTE: PLAQUE SHALL NOT BE INSTALLED WITHOUT SIGN (SEE SHEET 2).

\* See *Standard Highway Signs* Page 6-59 for symbol design.

Dimensions in inches

A	B	C	D	E	F	G	H	J	K	L	M	N	P
120	24	0.625	0.875	4	6 D	22.349	20.370	17.281	13.28	6	34.22	6.5	8.765
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
21.013	3	24	0.375	0.625	1.5	11	8	1.5	12
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK  
BACKGROUND — ORANGE (RETROREFLECTIVE)


# PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



RECOVERY  
Vector-Based, Vinyl-Ready Pictograph

- |                          |                           |
|--------------------------|---------------------------|
| COLORS: LEGEND, OUTLINE  | — WHITE (RETROREFLECTIVE) |
| BORDER                   | — BLUE (RETROREFLECTIVE)  |
| BACKGROUND (UPPER)       | — BLUE (RETROREFLECTIVE)  |
| BACKGROUND (LOWER RIGHT) | — RED (RETROREFLECTIVE)   |
| BACKGROUND (LOWER LEFT)  | — GREEN (RETROREFLECTIVE) |

**PROJECT FUNDING SOURCE SIGN ASSEMBLY  
AMERICAN RECOVERY AND REINVESTMENT ACT  
SIGN LAYOUT DETAILS**

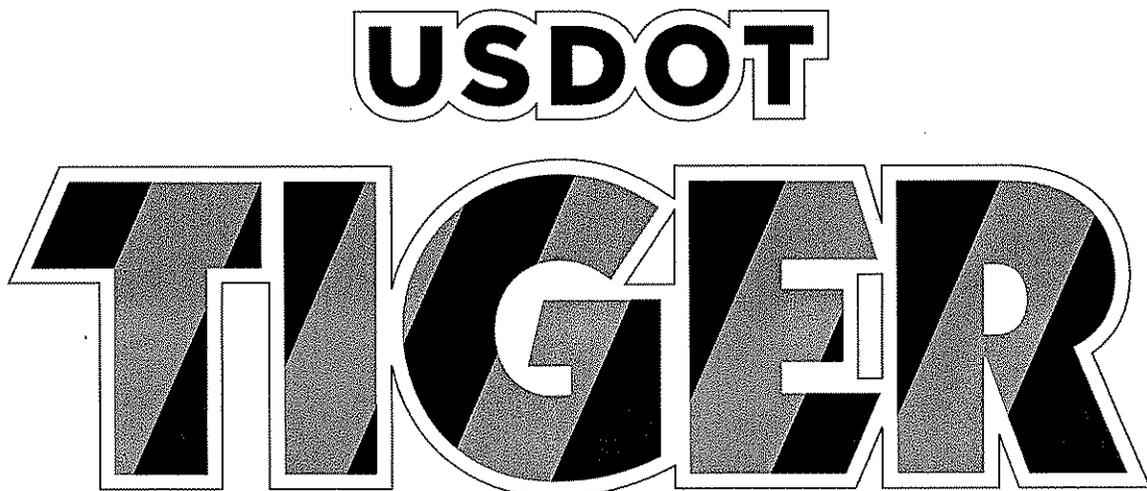

USDOT TIGER  
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE — WHITE (RETROREFLECTIVE)  
USDOT LEGEND — BLACK  
TIGER DIAGONALS — BLACK,  
ORANGE (RETROREFLECTIVE)